




JDB-5 轴承钢钢套
JDB-5 Steel Embedded Bushing



Matal 材质	S45C+Gr/石墨
Hardness 硬度	HRC≥40

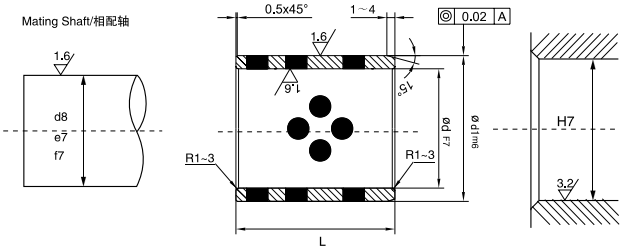

相配轴推荐公差等级
Tolerance recommended
d8 高载荷/high load
e7 轻载荷/light load
f7 高精度/high precision



单位unit:mm

d _{F7}		d _{1m6}		L ^{-0.10 -0.30}															
				8	10	12	15	16	20	25	30	35	40	50	60	70	80		
8	+0.028 +0.013	12	+0.018 +0.007	●	●	●	●												
10		14		●	●	●	●		●										
12		18			●	●	●	●	●	●	●								
13	+0.034 +0.016	19	+0.021 +0.008		●		●	●											
14		20			●	●	●		●	●	●								
15		21			●	●	●	●	●	●	●								
16		22			●	●	●	●	●	●	●	●	●						
18		24				●	●	●	●	●	●	●	●	●					
20		28			●	●	●	●	●	●	●	●	●	●	●				
22	+0.041 +0.020	32	+0.025 +0.009			●	●		●	●									
25		33				●	●	●	●	●	●	●	●	●	●	●			
30		38				●	●		●	●	●	●	●	●	●	●			
35	+0.050 +0.025	45							●	●	●	●	●	●	●	●			
40		50							●	●	●	●	●	●	●	●	●	●	
45		55	+0.030 +0.011								●	●	●	●	●	●			
50		60									●	●	●	●	●	●	●		