



JDB600 固体镶嵌自润滑轴承
JDB600 Cylindrical Oilless Bushing

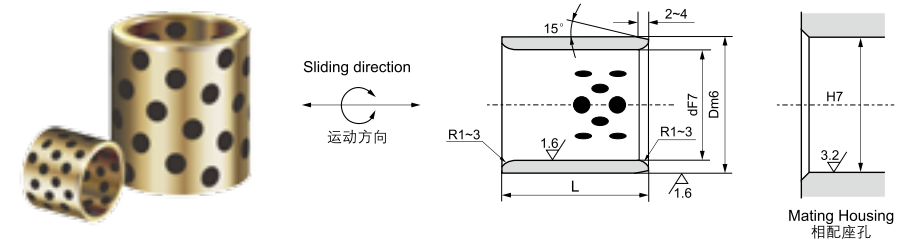


内径 F7 I.D. Ø d		外径 m6 O.D. Ø D		长度 L ^{-0.1} / _{-0.3}							
				8	10	12	15	16	19	20	25
6	+0.022 +0.010	10	+0.015 +0.006	061008	061010	061012					
8	+0.028 +0.013	12		081208	081210	081212	081215				
10		14	+0.018 +0.007	101408	101410	101412	101415			101420	
12		18		121808	121810	121812	121815	121816	121819	121820	121825
13		19			131910	131912	131915			131920	131925
14		20			142010	142012	142015			142020	142025
15	+0.034 +0.016	21			152110	152112	152115	152116		152120	152125
16		22			162210	162212	162215	162216	162219	162220	162225
17		23	+0.021 +0.008				172315				
18		24			182410	182412	182415	182416		182420	182425
19		26					192615			192620	
20		28			202810	202812	202815	202816	202819	202820	202825
20		30			203010	203012	203015	203016		203020	203025
22		32				223212	223215			223220	223225
25	+0.041 +0.020	33				253312	253315	253316		253320	253325
25		35				253512	253515	253516		253520	253525
28		38								283820	283825
30						303812	303815			303820	303825
30		40	+0.025 +0.009			304012	304015			304020	304025
32		42								324220	
35		44								354420	354425
35		45								354520	354525
38		48									
40		50					405015			405020	405025
40							405515				
45		55	+0.030 +0.011								
45		56									
45		60									

JDB600 固体镶嵌自润滑轴承
JDB600 Cylindrical Oilless Bushing




Material	600 # + Graphite
材质	高力黄铜+石墨



单位unit:mm


长度 L ^{-0.1} / _{0.3}							压装后内孔 I.D. After Press-Fitting	适用垫圈 JTW	内径 I.D. Ø d
30	35	40	50	60	70	80			
							+0.019 +0.007	—	6
							+0.025 +0.010	—	8
								10	10
121830							+0.031 +0.013	12	12
131930								13	13
142030							+0.030 +0.012	14	14
152130	152135	152140						15	15
162230	162235	162240						16	16
								18	17
182430	182435	182440						18	18
								20	19
202830	202835	202840	202850				+0.037 +0.016	20	20
203030	203035	203040	203050					20	20
								25	22
253330	253335	253340	253350	253360				25	25
253530	253535	253540	253550	253560				25	25
283830		283840						30	28
303830	303835	303840	303850	303860				30	30
304030	304035	304040	304050	304060				30	30
324230		324240						35	32
354430	354435	354440	354450	354460				35	35
354530	354535	354540	354550	354560			+0.045 +0.020	35	35
		384840						40	38
405030	405035	405040	405050	405060	405070	405080		40	40
405530	405535	405540	405550	405560				40	40
455530	455535	455540	455550	455560				45	45
455630	455635	455640	455650	455660				45	45
456030	456035	456040	456050	456060	456070	456080		45	45

JDB600 固体镶嵌自润滑轴承
JDB600 Cylindrical Oilless Bushing

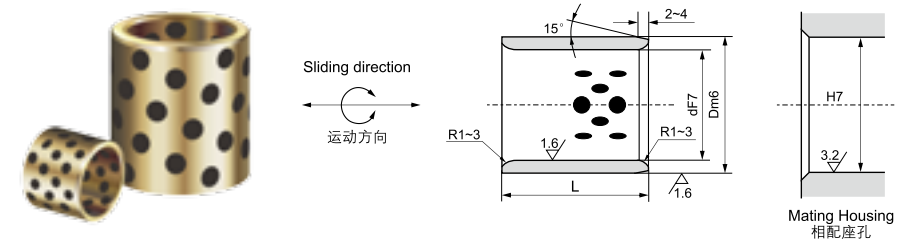


内径 F7 I.D. Ø d		外径 m6 O.D. Ø D		长度 L ^{0.1} _{0.3}							
				20	30	35	40	50	60	70	80
50	+0.050 +0.025	60	+0.030 +0.011	506020	506030	506035	506040	506050	506060	506070	506080
50		62			506230	506235	506240	506250	506260	506270	506280
50		65			506530		506540	506550	506560	506570	506580
55	+0.060 +0.030	70			557030	557035	557040	557050	557060	557070	
60		74			607430	607435	607440	607450	607460	607470	607480
60		75			607530	607535	607540	607550	607560	607570	607580
63		75							637560	637570	637580
65		80					658040	658050	658060	658070	658080
70		85			708530	708535	708540	708550	708560	708570	708580
70		90						709050	709060	709070	709080
75	+0.071 +0.036	90	+0.035 +0.013					759050	759060	759070	759080
75		95						759550	759560	759570	759580
80		96					809640	809650	809660	809670	809680
80		100					8010040		8010060	8010070	8010080
85		100							8510060		8510080
90		110						9011050	9011060		9011080
100		120						10012050	10012060	10012070	10012080
110	+0.083 +0.043	130	+0.040 +0.015					11013050		11013070	11013080
120		140								12014070	12014080
125		145									
130		150									13015080
140		160									
150		170									15017080
160		180									16018080
170	+0.096 +0.050	190	+0.046 +0.017								
180		200									
190		210									
200		230									

JDB600 固体镶嵌自润滑轴承
JDB600 Cylindrical Oilless Bushing



Material	600 # + Graphite
材质	高力黄铜+石墨





d8: High load 高负荷
e7: Light load 轻负荷
f7: High precision 高精度

Mating Shaft
相配轴

单位unit:mm

长度 L ^{-0.1} / _{-0.3}							压装后内孔 I.D. After Press- Fitting	适用垫圈 JTW	内径 I.D. Ø d
90	100	120	130	140	150	200			
							+0.045 +0.020	50	50
									50
	5065100						+0.055 +0.025	55	55
								60	60
	6075100								60
								65	63
									65
	7085100						+0.054 +0.024	70	70
									70
	7590100							75	75
	7595100								75
	8096100	8096120						80	80
	80100100	80100120		80100140					80
							+0.065 +0.030	90	85
9011090	90110100	90110120							90
10012090	100120100	100120120		100120140			+0.064 +0.029	120	100
	110130100	110130120							110
12014090	120140100	120140120		120140140			+0.076 +0.036	—	120
	125145100	125145120							125
	130150100		130150130						130
	140160100			140160140					140
	150170100				150170150				150
	160180100				160180150				160
	170190100				170190150				170
	180200100				180200150				180
	190210100				190210150				190
					200230150	200230200	+0.088 +0.042		200




24 Solid-lubricating Bearings

JFB600 自润滑翻边轴套
JFB600 Metric Flanged Bushes



Material	600 # + Graphite
材质	高力黄铜 + 石墨






d8: High load 高负荷
e7: Light load 轻负荷
f7: High precision 高精度

单位unit:mm

长度 L ^{+0.1} _{-0.3}									压装后内孔 I.D. After Press- Fitting	内径 I.D. Ø d
30	35	40	50	60	67.5	80	100	120		
									+0.016 +0.004	6
									+0.021 +0.006	8
										10
1230									+0.031 +0.013	12
1330										13
										14
1530									+0.026 +0.008	15
1630	1635	1640								16
1830	1835	1840								18
2030	2035	2040							+0.037 +0.016	20
2530	2535	2540	2550						+0.032 +0.011	25
3030	3035	3040	3050							30
3130	3135	3140								31.5
3530	3535	3540	3550						+0.046 +0.021	35
4030	4035	4040	4050							40
4530	4535	4540	4550	4560					+0.040 +0.015	45
5030	5035	5040	5050	5060						50
		5540		5560					+0.055 +0.025	55
		6040	6050	6060		6080				60
					6367				+0.053 +0.023	63
				6560						65
			7050			7080				70
				7560					+0.046 +0.016	75
				8060		8080	80100			80
				9060		9080			+0.060 +0.025	90
						10080	100100			100
						12080	120100		+0.052 +0.017	120
						13080	130100		+0.068 +0.028	130
						14080	140100			140
							150100	150120	+0.065 +0.025	150
							160100	160120		160


JDBB 自润滑翻边轴套
JDBB Metric Flange Bushes




Mating Housing
相配座孔

内径 E7 I.D. Ø d		外径 r6 O.D. Ø D		翻边 Flange			长度 L ^{-0.1 +0.3}								
				Ø F	t	10	11	12	13	15	18	20	23	25	
6	+0.032 +0.020	10	+0.028 +0.019	20	3	0 -0.03	0610	0611	0612						
8	+0.040 +0.025	12	25					0812	0813	0815					
10		14	25						1013		1018				
12		18	30				1211				1218		1223		
13	+0.050 +0.032	19	30							1313		1318		1323	
15		21	35							1513		1518		1523	
16		22	35							1613		1618		1623 1625	
18		24	40								1818		1823		
20		28	45										2020		2025
25	+0.061 +0.040	33	50	5									2520		2525
30		38	55										3020		3025
35	+0.075 +0.050	44	65	7										3520	
40		50	70												
50		62	90		8										
60		74	110												
70		+0.090 +0.060	85		120	10									
80	96		140												

JDBB 自润滑翻边轴套
JDBB Metric Flange Bushes




Material	600 # + Graphite
材质	高力黄铜+石墨



单位unit:mm


长度 L ^{+0.1} _{-0.3}												压装后内孔 I.D. After Press- Fitting	内径
27	35	37	38	47	48	50	58	60	68	80	90	I.D. After Press- Fitting	d
												+0.016 +0.004	6
												+0.021 +0.006	8
													10
												+0.031 +0.013	12
												+0.026 +0.008	13
													15
													16
													18
												+0.037 +0.016	20
												+0.032 +0.011	25
	3035												30
	3535											+0.046 +0.021	35
4027		4037		4047									40
			5038		5048		5058					+0.040 +0.015	50
			6038		6048		6058		6068			+0.053 +0.023	60
						7050				7080		+0.046 +0.016	70
							8060				8090		80

JFFB 自润滑轴瓦
JFFB Half-Bearing


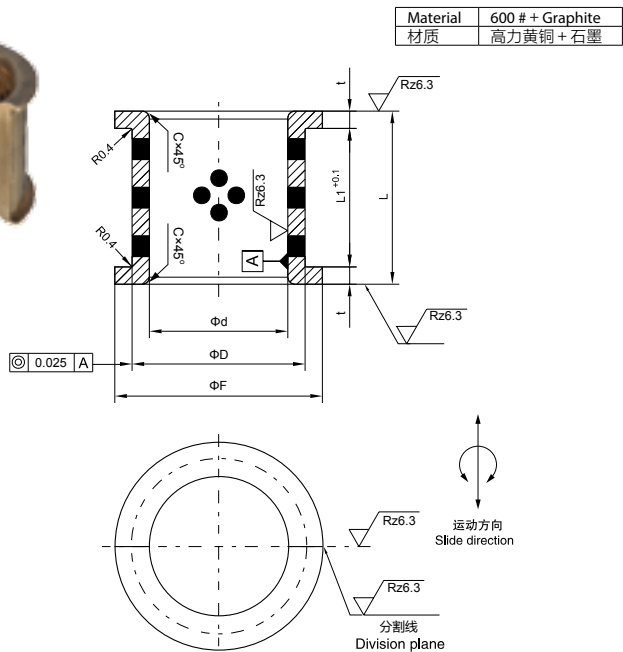


产品代号 Standard No.	内径 H7 I.D. Φd	外径 O.D. ΦD	ΦF d11	L h12	L1 +0.1 0	t	C
JFFB-030	30	38	48	34	22	6	1
JFFB-035	35	45	55	45	32	6.5	
JFFB-040	40	50	60	50	35	7.5	
JFFB-045	45	55	65	55	40	7.5	
JFFB-050	50	60	70	60	45	7.5	
JFFB-060	60	70	80	70	50	10	
JFFB-070	70	85	95	80	60	10	2
JFFB-080	80	95	110	95	70	12.5	
JFFB-090	90	105	120	105	80	12.5	
JFFB-100	100	115	130	115	90	12.5	
JFFB-110	110	125	140	125	100	12.5	
JFFB-120	120	135	150	140	110	15	
JFFB-140	140	160	175	160	120	20	
JFFB-160	160	180	200	180	140	20	

JTW600 标准止推垫片
JTW600 Oilless Thrust Washer





Material	600 # + Graphite
材质	高力黄铜+石墨



单位unit:mm

型号规格 Standard No.	I.D. 内径Ø d		O.D. 外径Ø D	厚度 Thickness		螺丝孔 Screw Holes						
						P.C.D	数量 Number of Holes	规格 Flat Head Screw	d1			
JTW-0603	6.2	+0.2 +0.1	25	3	0 -0.1	15	2	M3	3.5			
JTW-0803	8.2		28			18						
JTW-1003	10.2		30			20						
JTW-1203	12.2		40			28						
JTW-1203N	12.2					Without flat head screw hole 无定位孔						
JTW-1303	13.2					28	2	M3	3.5			
JTW-1403	14.2											
JTW-1503	15.2		35									
JTW-1603	16.2		+0.3 +0.1			50	5	0 -0.1	Without flat head screw hole 无定位孔			
JTW-1603N	16.2											
JTW-1803	18.2	35		2	M3				3.5			
JTW-2005	20.2											
JTW-2505	25.2	40			M5				6			
JTW-3005	30.2	45										
JTW-3505	35.2	50										
JTW-4007	40.2	80		7	60	4			M6	7		
JTW-4507	45.2										90	70
JTW-5008	50.3										100	75
JTW-5508	55.3	110	8	85	M8		9					
JTW-6008	60.3			90								
JTW-6508	65.3			95								
JTW-7010	70.3	130	10	100				M10	11			
JTW-7510	75.3			110								
JTW-8010	80.3			120								
JTW-9010	90.5			140								
JTW-10010	100.5	190		160								
JTW-12010	120.5	200		175								


JDBS 自润滑关节轴承
JDBS Metric Spherical Bushes

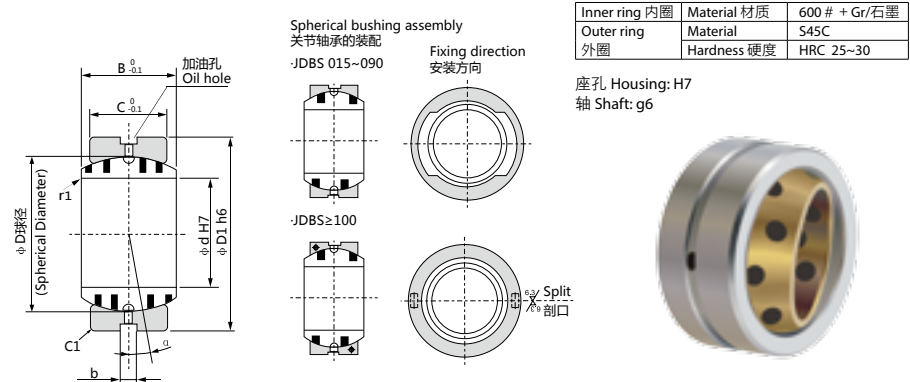


单位unit:mm

型号规格 Standard No.	d	H7	D1	h6	B	C	D	b	调整角度 Alignment Angle α°	径向承载 Allowable Radial Load (kN)	径向承载 Allowable Thrust Load (kN)
JDBS-015	15	^{+0.018} ₀	26	⁰ _{-0.013}	12	9	22	4	8	6.5	0.5
JDBS-020	20	^{+0.021} ₀	32	⁰ _{-0.016}	16	14	28		4	12.6	1.4
JDBS-025	25		42		21	18	36		5	21.8	2.5
JDBS-030	30		50		27	23	44		6	32.0	3.5
JDBS-035	35	^{+0.025} ₀	55	⁰ _{-0.019}	30	26	49		5	43.7	4.8
JDBS-040	40		62		33	28	55		6	54.7	5.7
JDBS-045	45		72		36	31	62		5	69.7	7.2
JDBS-050	50		80		42	36	70		5	92.4	10
JDBS-060	60	^{+0.030} ₀	100	⁰ _{-0.022}	53	45	90		6	143	16
JDBS-070	70		110		58	50	99		5	181	20
JDBS-080	80		130		70	60	115		6	254	30
JDBS-090	90	^{+0.035} ₀	140	⁰ _{-0.025}	76	65	125		6	313	36
JDBS-100	100		160		88	75	145	6	6	544	64
JDBS-110	110		170		93	80	155		5	642	73
JDBS-120	120	^{+0.040} ₀	190	⁰ _{-0.029}	105	90	17		6	797	94
JDBS-130	130		200		110	95	180		5	880	105
JDBS-140	140		210		90	70	180		7	668	56
JDBS-150	150		220		120	105	200		5	1135	129
JDBS-160	160	^{+0.046} ₀	230	⁰ _{-0.036}	105	80	200		8	891	73
JDBS-180	180		260		105	80	225		6	1002	74
JDBS-200	200		290		130	100	250		7	1434	117
JDBS-220	220	^{+0.052} ₀	320	⁰ _{-0.040}	135	100	275		8	1577	118
JDBS-240	240		340		140	100	300	9	8	1720	118
JDBS-260	260		370		150	110	325		7	2072	143
JDBS-280	280		400		155	120	350		6	2455	172
JDBS-300	300		430		165	120	375		7	2630	

JESW 自润滑板
JESW Oilless Wear Plate



Material	600 # + Graphite
材质	高力黄铜+石墨




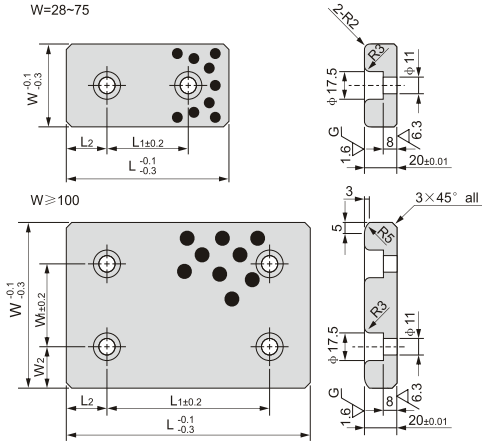


单位unit:mm


型号规格 Standard No.	W	L	W ₁	W ₂	L ₁	L ₂
JESW-28 × 75	28	75			45	15
JESW-28 × 100		100			50	25
JESW-28 × 150		150			100	
JESW-38 × 75	38	75			45	15
JESW-38 × 100		100			50	25
JESW-38 × 150		150			100	
JESW-48 × 75	48	75			45	15
JESW-48 × 100		100			50	
JESW-48 × 125		125			75	25
JESW-48 × 150		150	-	-	100	
JESW-48 × 200		200			150	
JESW-58 × 75		75			45	15
JESW-58 × 100	58	100			50	
JESW-58 × 150		150			100	25
JESW-75 × 75		75			25	
JESW-75 × 100	75	100			50	25
JESW-75 × 125		125			75	
JESW-75 × 150		150			100	
JESW-75 × 200		200			150	

型号规格 Standard No.	W	L	W ₁	W ₂	L ₁	L ₂
JESW-100 × 100	100	100		25	50	
JESW-100 × 125		125			75	
JESW-100 × 150		150			100	25
JESW-100 × 200		200			150	
JESW-100 × 250		250			200	
JESW-100 × 300	125	300	50	37.5	200	50
JESW-125 × 125		125			75	
JESW-125 × 150		150			100	25
JESW-125 × 200		200			150	
JESW-125 × 250		250			200	50
JESW-125 × 300	150	300	100	25	200	75
JESW-125 × 350		350			200	
JESW-150 × 150		150			100	
JESW-150 × 200		200			150	25
JESW-150 × 250		250			200	

JTWP 自润滑板
JTWP Oilless Wear Plate



DSEW	500 # + Graphite 高力黄铜 + 石墨
DSEF	FC250 + Graphite 铸铁 + 石墨



单位unit:mm







型号规格 Standard No.	W	L	W ₁	W ₂	L ₁	L ₂
JTWP-28 × 75	28	75			45	15
JTWP-28 × 100		100			50	
JTWP-28 × 125		125			75	25
JTWP-28 × 150		150			100	
JTWP-38 × 75	38	75			45	15
JTWP-38 × 100		100			50	
JTWP-38 × 125		125			75	25
JTWP-38 × 150		150			100	
JTWP-48 × 75	48	75	-	-	45	15
JTWP-48 × 100		100			50	
JTWP-48 × 125		125			75	25
JTWP-48 × 150		150			100	
JTWP-48 × 200		200			150	
JTWP-58 × 75	58	75			45	15
JTWP-58 × 100		100			50	25
JTWP-58 × 150		150			100	

型号规格 Standard No.	W	L	W ₁	W ₂	L ₁	L ₂
JTWP-75 × 75	75	75	-	-	25	
JTWP-75 × 100		100			50	
JTWP-75 × 125		125			75	
JTWP-75 × 150		150			100	
JTWP-75 × 200		200			150	
JTWP-100 × 100	100	100	50	25	50	
JTWP-100 × 125		125			75	
JTWP-100 × 150		150			100	25
JTWP-100 × 200		200			150	
JTWP-100 × 250		250			200	
JTWP-125 × 150	125	150	37.5	150	100	
JTWP-125 × 200		200			200	
JTWP-125 × 250		250			200	
JTWP-150 × 150		150			100	
JTWP-150 × 200	150	200	100	25	150	

JUWP 自润滑板
JUWP Oilless Wear Plate



Material	600 # + Graphite
材质	高力黄铜+石墨

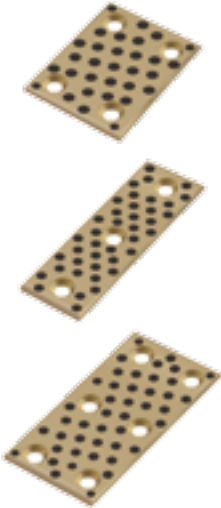

单位unit:mm


型号规格 Standard No.	W	L	W ₁	L ₁	d	h	螺栓 Mounting Bolt
JUWP 18 × 50	18	50	-	20	6.5	1.5	M6
JUWP 18 × 75		75		45			
JUWP 18 × 100		100		70			
JUWP 18 × 150		150		60			
JUWP 28 × 50	28	50	-	20	10	0.8	M8
JUWP 28 × 75		75		45			
JUWP 28 × 100		100		70			
JUWP 28 × 150		150		60			
JUWP 38 × 50	38	50	-	20	10	0.8	M8
JUWP 38 × 75		75		45			
JUWP 38 × 100		100		70			
JUWP 38 × 150		150		60			

型号规格 Standard No.	W	L	W ₁	L ₁	d	h	螺栓 Mounting Bolt
JUWP 48 × 75	48	75	-	45	10	0.8	M8
JUWP 48 × 100		100		70			
JUWP 48 × 125		125		95			
JUWP 48 × 150		150		60			
JUWP 75 × 75	75	75	45	45	10	0.8	M8
JUWP 75 × 100		100		70			
JUWP 75 × 125		125		95			
JUWP 75 × 150		150		60			
JUWP 100 × 100	100	100	70	70	10	0.8	M8
JUWP 100 × 125		125		95			
JUWP 100 × 150		150		60			

JOLP 自润滑板
JOLP Oilless Wear Plate



Material	600 # + Graphite
材质	高力黄铜 + 石墨

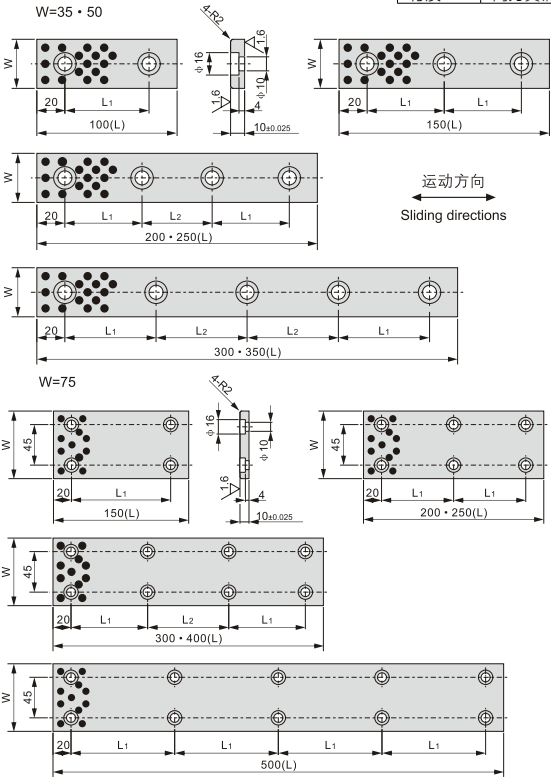

单位:mm


型号规格 Standard No.	W	L	螺栓位置 Bolt Position		螺栓数量 Bolt Q'ty
			L ₁	L ₂	
JOLP-35 × 100	35	100	60	-	2
JOLP-35 × 150		150	55	-	3
JOLP-35 × 200		200	55	50	4
JOLP-35 × 250		250	70	70	5
JOLP-35 × 300		300	65	65	5
JOLP-35 × 350	50	350	80	75	5
JOLP-50 × 100		100	60	-	2
JOLP-50 × 150		150	55	-	3
JOLP-50 × 200		200	55	50	4

型号规格 Standard No.	W	L	螺栓位置 Bolt Position		螺栓数量 Bolt Q'ty
			L ₁	L ₂	
JOLP-50 × 250	50	250	70	70	4
JOLP-50 × 300		300	65	65	5
JOLP-50 × 350		350	80	75	5
JOLP-75 × 150		150	110	-	4
JOLP-75 × 200	75	200	80	-	6
JOLP-75 × 250		250	105	-	6
JOLP-75 × 300		300	85	90	8
JOLP-75 × 400		400	120	120	8
JOLP-75 × 500		500	115	-	10

JOML 自润滑板
JOML Oilless Wear Plate



Material	600 # + Graphite
材质	高力黄铜+石墨

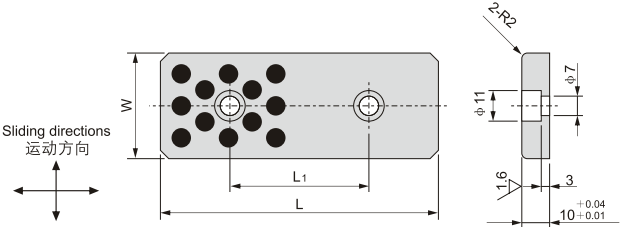

单位unit:mm

型号规格 Standard No.	W	L	L ₁
JOML-18x75	18	75	45
JOML-18x100		100	50
JOML-18x125		125	75
JOML-18x150		150	100
JOML-28x75	28	75	45
JOML-28x100		100	50
JOML-28x125		125	75
JOML-28x150		150	100
JOML-38x75	38	75	45
JOML-38x100		100	50
JOML-38x125		125	75
JOML-38x150		150	100
JOML-48x75	48	75	45
JOML-48x100		100	50
JOML-48x125		125	75
JOML-48x150		150	100




JTLP 自润滑板
JTLP Oilless Wear Plate



Material	600 # + Graphite
材质	高力黄铜+石墨






$W=18 \cdot 28 \cdot 38 \cdot 48$

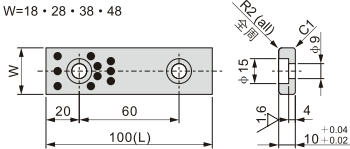

单位unit:mm

型号规格 Standard No.	W	L
JTLP-18x100	18	100
JTLP-18x160		160
JTLP-18x220		220
JTLP-28x100	28	100
JTLP-28x160		160
JTLP-28x220		220
JTLP-38x100	38	100
JTLP-38x160		160
JTLP-38x220		220
JTLP-48x100	48	100
JTLP-48x160		160
JTLP-48x220		220
JTLP-58x100	58	100
JTLP-58x160		160
JTLP-58x220		220
JTLP-68x100	68	100
JTLP-68x160		160
JTLP-68x220		220

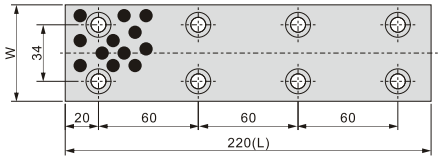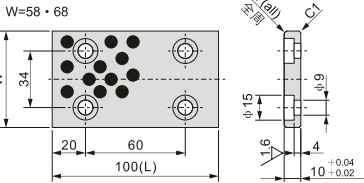


Sliding directions



JGLDW 自润导轨
JGLDW Oilless Guide Rail



Material	600 # + Graphite
材质	高力黄铜+石墨

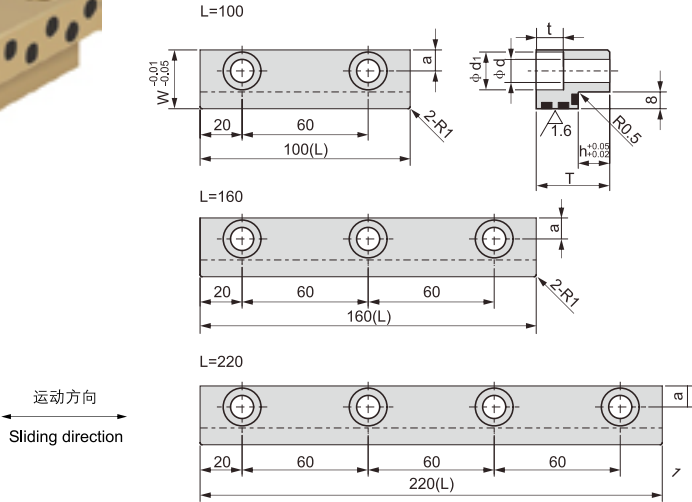

单位unit:mm


型号规格 Standard No.	W	L	T	a	d	d ₁	h	t
JGLDW-23x100	23	100	30	7.5	7	11	15	7
JGLDW-23x160		160						
JGLDW-23x220		220						
JGLDW-23x100		100	41				26	
JGLDW-23x160		160						
JGLDW-23x220		220						
JGLDW-28x100	28	100	25	10	11	18	10	13
JGLDW-28x160		160						
JGLDW-28x220		220						
JGLDW-28x100		100	35				15	
JGLDW-28x160		160						
JGLDW-28x220		220						
JGLDW-28x100		100	56				26	
JGLDW-28x160		160						
JGLDW-28x220		220						

JTGLW 自润导轨
JTGLW Oilless Guide Rail



Material	600 # + Graphite
材质	高力黄铜+石墨



运动方向
Sliding direction

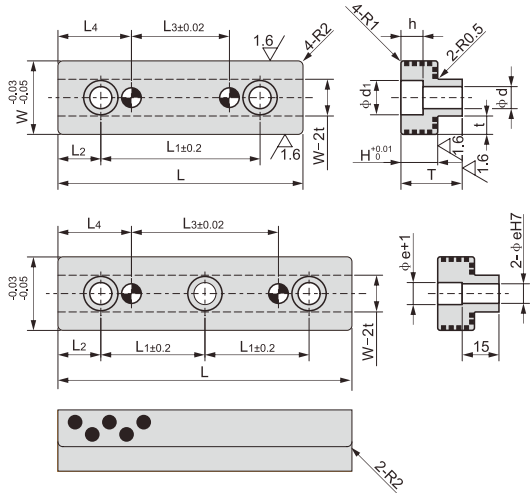


单位unit:mm

型号规格 Standard No.	W	L	L ₁	L ₂	L ₃	L ₄	T	H	t	d	d ₁	h	e H7
JTGLW-20x60	20	60	35	12.5	15	22.5	15	8	4.5	5.5	9.5	6	6 ^{+0.012} ₀
JTGLW-20x80		80	55		35								
JTGLW-20x100		100	75		55								
JTGLW-25x80	25	80	50	15	20	30	20	8	5.5	6.5	11	7	6 ^{+0.012} ₀
JTGLW-25x100		100	70		40								
JTGLW-25x120		120	45		60								
JTGLW-30x100	30	100	65	17.5	40	30	25	10	7.5	9	14	9	8 ^{+0.015} ₀
JTGLW-30x120		120	42.5		60								
JTGLW-30x140		140	52.5		80								
JTGLW-40x120	40	120	40	20	40	40	30	15	11	11	18	11	8 ^{+0.015} ₀
JTGLW-40x140		140	50		60								
JTGLW-40x160		160	60		80								
JTGLW-40x180		180	70		100								

JGLXS 自润滑板
JGLXS Oilless Wear Plate



运动方向
Sliding direction

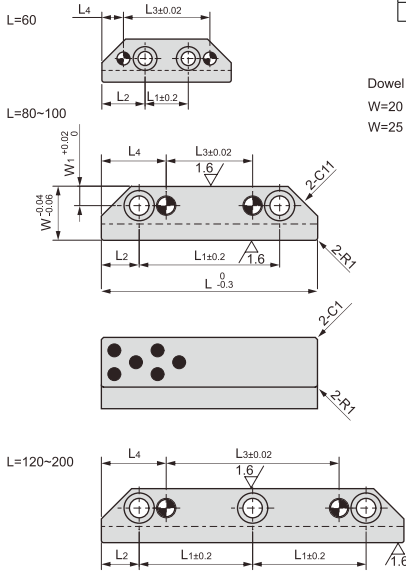

Material	600 # + Graphite
材质	高力黄铜+石墨


Dowel hole 定位销

W=20

$\phi 6^{+0.012}_0$

W=25 + 30

$\phi 8^{+0.015}_0$





单位unit:mm

型号规格 Standard No.	W	L	T	W ₁	L ₁	L ₂	L ₃	L ₄	H	t	r
JGLXS-20x60xT	20	60	23	9	20	20	40	10	8	5.5	0.5
JGLXS-20x80xT		80			50		20				
JGLXS-20x100xT		100			70		40				
JGLXS-20x120xT		120			45	15	60				
JGLXS-20x140xT		140			55		80				
JGLXS-20x160xT		160			65		100				
JGLXS-25x80xT	25	80	28 33 43	9	45		20	30	10	7.5	0.8
JGLXS-25x100xT		100			65		40				
JGLXS-25x120xT		120			42.5		60				
JGLXS-25x140xT		140			52.5	17.5	80				
JGLXS-25x160xT		160			62.5		100				
JGLXS-25x180xT		180			72.5		120				
JGLXS-25x200xT		200			82.5		140				
JGLXS-30x100xT	30	100	43 53	11	60		20	40	15	11	
JGLXS-30x120xT	30	120			40		40				
JGLXS-30x140xT	30	140			50	20	60				
JGLXS-30x160xT	30	160			60		80				
JGLXS-30x180xT	30	180			70		100				
JGLXS-30x200xT	30	200			80		120				

JGLX 自润滑板
JGLX Oilless Wear Plate


Material	600 # + Graphite
材质	高力黄铜+石墨

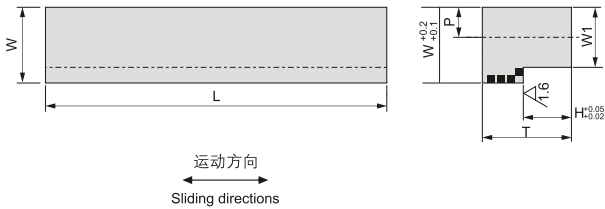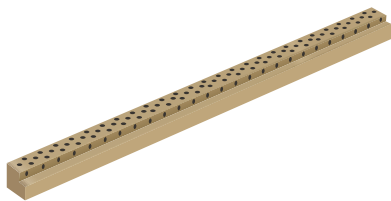


单位unit:mm

型号规格 Standard No.	W	L	T	W ₁	H	推荐安装孔 Recommended Mounting Hole			
						P	Size		
JGLX-20 × 15	20	320	15	14.5	5	8	M8		
JGLX-20 × 20			20						
JGLX-20 × 25			25						
JGLX-20 × 23			23						
JGLX-20 × 28			28						
JGLX-25 × 28	25	320 605	28	17.5	10	10			
JGLX-25 × 33			33						
JGLX-25 × 43			43						
JGLX-30 × 38	30		38	19	15			12	
JGLX-30 × 43			43						
JGLX-30 × 53			53						
JGLX-35 × 43	35		43	23	20	14	M10		
JGLX-35 × 53			53						
JGLX-35 × 63			63						
JGLX-40 × 45	40		45	28	20			14	M12
JGLX-40 × 55			55						
JGLX-40 × 65			65						

JSOL 自润滑板
JSOL Oilless Wear Plate



Material	600 # + Graphite
材质	高力黄铜 + 石墨


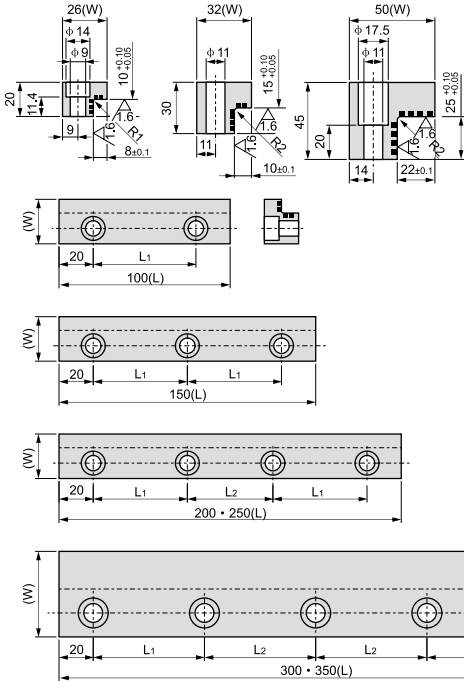


Sliding directions
运动方向

单位unit:mm

型号规格 Standard No.	W	L	螺栓孔位置 Bolt Position		螺栓孔 Mounting Bolt	
			L1	L1	尺寸 Size	数量 Quantity
JSOL-26 × 100	26	100	60	-	M8	2
JSOL-26 × 150		150	55	-		3
JSOL-26 × 200		200	55	50		4
JSOL-32 × 100	32	100	60	-	M10	2
JSOL-32 × 150		150	55	-		3
JSOL-32 × 200		200	55	50		4
JSOL-32 × 250	50	250	70	70		
JSOL-50 × 200		200	55	50		
JSOL-50 × 250		250	70	70		
JSOL-50 × 300		300	65	65	5	
JSOL-50 × 350		350	80	75		

JFRP 自润滑板
JFRP Oilless Wear Plate

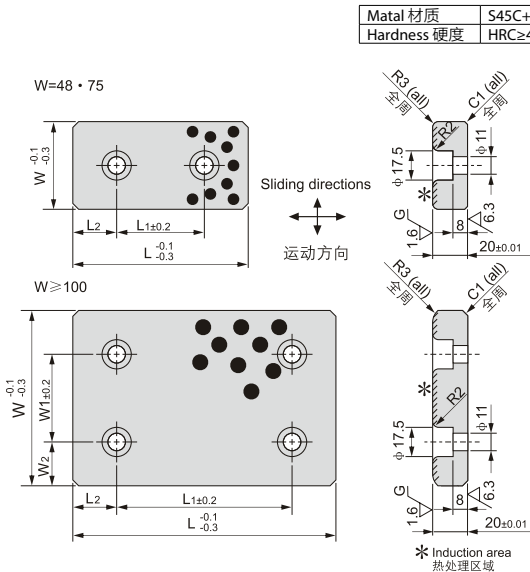


单位unit:mm

型号规格 Standard No.	W	L	W ₁	W ₂	L ₁	L ₂
JFRP-48 × 75	48	75	-	-	45	15
JFRP-48 × 100		100			50	
JFRP-48 × 125		125			75	
JFRP-48 × 150		150			100	
JFRP-48 × 200		200			150	
JFRP-75 × 75	75	75	-	-	25	25
JFRP-75 × 100		100			50	
JFRP-75 × 125		125			75	
JFRP-75 × 150		150			100	
JFRP-75 × 200		200			150	
JFRP-100 × 100	100	100	50	25	50	25
JFRP-100 × 125		125			75	
JFRP-100 × 150		150			100	
JFRP-100 × 200		200			150	
JFRP-100 × 250		250			200	
JFRP-125 × 125	125	125	50	37.5	75	25
JFRP-125 × 150		150			100	
JFRP-125 × 200		200			150	
JFRP-125 × 250		250			200	
JFRP-150 × 150	150	150	100	25	100	
JFRP-150 × 200		200			150	
JFRP-150 × 250		250			200	
JFRP-150 × 250		250			200	

JESF 自润滑板
JESF Oilless Wear Plate



Matal 材质	S45C+Gr/石墨
Hardness 硬度	HRC≥40

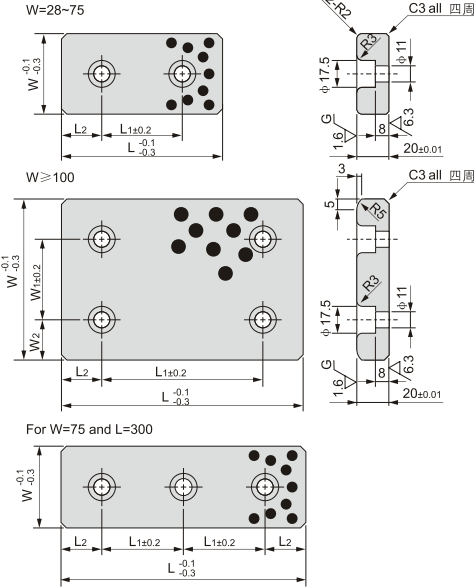


单位unit:mm




型号规格 Standard No.	W	L	W ₁	W ₂	L ₁	L ₂
JESF-28 × 75	28	75			45	15
JESF-28 × 100		100			50	25
JESF-28 × 125		125			75	
JESF-28 × 150		150			100	
JESF-28 × 200		200			150	15
JESF-38 × 75	38	75			45	
JESF-38 × 100		100			50	
JESF-38 × 125		125			75	25
JESF-38 × 150		150			100	
JESF-38 × 200		200			150	
JESF-48 × 75	48	75			45	15
JESF-48 × 100		100			50	25
JESF-48 × 125		125			75	
JESF-48 × 150		150			100	
JESF-48 × 200		200			150	15
JESF-58 × 75	58	75			45	
JESF-58 × 100		100			50	
JESF-58 × 125		125			75	25
JESF-58 × 150		150			100	
JESF-58 × 200		200			150	
JESF-75 × 75	75	75			25	25
JESF-75 × 100		100			50	
JESF-75 × 125		125			75	

型号规格 Standard No.	W	L	W ₁	W ₂	L ₁	L ₂
JESF-75 × 150	75	150	-	-	100	25
JESF-75 × 200		200			150	
JESF-75 × 250		250			200	
JESF-75 × 300		300			100	50
JESF-100 × 100	100	100	50	25	50	25
JESF-100 × 125		125			75	
JESF-100 × 150		150			100	
JESF-100 × 200		200			150	50
JESF-100 × 250		250			200	
JESF-100 × 300	125	300	50	37.5	200	25
JESF-125 × 125		125			75	
JESF-125 × 150		150			100	
JESF-125 × 200		200			150	50
JESF-125 × 250		250			200	
JESF-125 × 300	150	300	100	25	200	25
JESF-150 × 150		150			100	
JESF-150 × 200		200			150	
JESF-150 × 250		250			200	25
JESF-150 × 300		300			250	
JESF-200 × 200	200	200	150	25	150	250
JESF-200 × 250		250			200	
JESF-200 × 300		300			250	

JSP 自润滑板
JSP Oilless Wear Plate




Material	600 # + Graphite
材质	高力黄铜 + 石墨

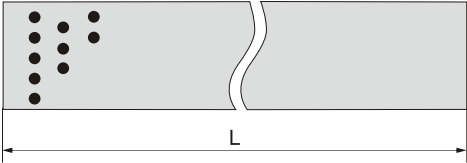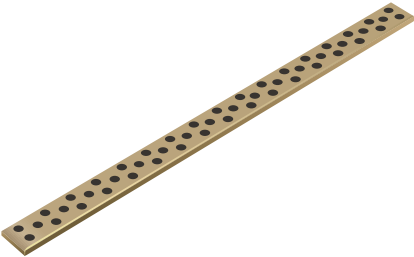

运动方向
Sliding directions

单位unit:mm

型号规格 Standard No.	W	T	L	推荐螺栓 Recommend bolt
JSP-20 × 5 × 305	20	5.3	305	沉头螺钉 M6 × 10 Countersunk head screw
JSP-25 × 5 × 305	25			
JSP-30 × 5 × 305	30			
JSP-30 × 5 × 400	30			
JSP-35 × 10 × 605	35	10.3	605	沉头螺钉 M8 × 15 Hex socket round head screw
JSP-40 × 10 × 605	40			
JSP-50 × 10 × 605	50			
JSP-60 × 15 × 605	60			
JSP-80 × 15 × 605	80	20.3	605	沉头螺钉 M10 × 20 Hex socket bolt
JSP-80 × 20 × 605	80			
JSP-100 × 20 × 605	100			

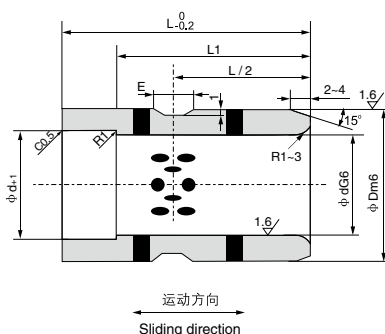


Material	600 # + Graphite
材质	高力黃銅 + 石墨

单位unit:mm

型号规格 Standard No.	d	L	d G6	D	m6	L1	E
JGB-12×9		9				9	
JGB-12×14	12	14	12		18	14	4
JGB-12×19		19			+0.018 +0.007	19	
JGB-12×24		24				24	
JGB-16×14		14		+0.017 +0.006		14	
JGB-16×19		19				19	
JGB-16×24	16	24	16		25	24	
JGB-16×29		29				29	
JGB-16×34		34				34	
JGB-16×39		39				35	
JGB-20×14		14			+0.021 +0.008	14	
JGB-20×19		19				19	
JGB-20×24		24				24	
JGB-20×29	20	29	20		30	29	
JGB-20×34		34				34	
JGB-20×39		39				39	
JGB-20×49		49				40	
JGB-25×24		24				24	6
JGB-25×29		29				29	
JGB-25×34	25	34	25	+0.020 +0.007	35	34	
JGB-25×39		39				39	
JGB-25×49		49				49	
JGB-25×59		59				50	
JGB-30×29		29			+0.025 +0.009	29	
JGB-30×34		34				34	
JGB-30×39		39				39	
JGB-30×49	30	49	30		42	49	
JGB-30×59		59				59	
JGB-30×69		69				60	
JGB-30×79		79				60	

型号规格 Standard No.	d	L	d G6	D m6	L1	E	
JGB-35 × 29	35	29	35	48	+0.025 +0.009	29	8
JGB-35 × 39		34				34	
JGB-35 × 39		39				39	
JGB-35 × 49		49				49	
JGB-35 × 59		59				59	
JGB-35 × 69		69				69	
JGB-35 × 79		79			70		
JGB-40 × 39	40	39	40	+0.025 +0.009	55	39	10
JGB-40 × 49		49				49	
JGB-40 × 59		59				59	
JGB-40 × 69		69				69	
JGB-40 × 79		79				79	
JGB-40 × 89		89				80	
JGB-50 × 49	50	49	50	70	+0.030 +0.011	49	10
JGB-50 × 59		59				59	
JGB-50 × 69		69				69	
JGB-50 × 79		79				79	
JGB-50 × 89		89				89	
JGB-50 × 99		99				90	
JGB-60 × 59	60	59	60	80	+0.029 +0.010	59	10
JGB-60 × 69		69				69	
JGB-60 × 79		79				79	
JGB-60 × 89		89				89	
JGB-60 × 99		99				90	
JGB-60 × 109		109				90	
JGB-80 × 69	80	69	80	100	+0.035 +0.013	69	10
JGB-80 × 79		79				79	
JGB-80 × 89		89				89	
JGB-80 × 99		99				99	
JGB-80 × 109		109				100	
JGB-80 × 119		119				100	

JGBF 自润滑翻边导向套
JGBF Oilless Ejector Guide Bushings

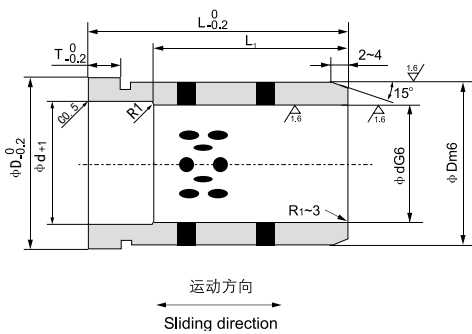


Material	600 # + Graphite
材质	高力黄铜 + 石墨

单位unit:mm

型号规格 Standard No.	d	L	d G6	D m6	D ₁	T	L ₁
JGBF-12 × 19	12	19	12	18	+0.018 +0.007	25	19
JGBF-12 × 24	12	24					24
JGBF-12 × 29	12	29					29
JGBF-12 × 34	12	34					34
JGBF-16 × 19	16	19	16	25	+0.016 +0.006	30	19
JGBF-16 × 24	16	24					24
JGBF-16 × 29	16	29					29
JGBF-16 × 34	16	34					30
JGBF-16 × 39	16	39	16	30	+0.025 +0.009	35	30
JGBF-16 × 49	16	49					30
JGBF-20 × 24	20	24					24
JGBF-20 × 29	20	29					29
JGBF-20 × 34	20	34	20	30	+0.025 +0.009	35	34
JGBF-20 × 39	20	39					39
JGBF-20 × 49	20	49					40
JGBF-20 × 59	20	59					40
JGBF-25 × 24	25	24	25	35	+0.020 +0.007	40	24
JGBF-25 × 29	25	29					29
JGBF-25 × 34	25	34					34
JGBF-25 × 39	25	39					39
JGBF-25 × 49	25	49	25	42	+0.025 +0.009	47	49
JGBF-25 × 59	25	59					50
JGBF-25 × 69	25	69					50
JGBF-30 × 29	30	29					29
JGBF-30 × 34	30	34	30	42	+0.025 +0.009	47	34
JGBF-30 × 39	30	39					39
JGBF-30 × 49	30	49					49
JGBF-30 × 59	30	59					59
JGBF-30 × 69	30	69	30	42	+0.025 +0.009	47	60
JGBF-30 × 79	30	79					60


型号规格 Standard No.	d	L	d G6	D m6	D ₁	T	L ₁
JGBF-35 × 39	35	39	35	48	+0.025 +0.009	54	39
JGBF-35 × 49	35	49					49
JGBF-35 × 59	35	59					59
JGBF-35 × 69	35	69					69
JGBF-35 × 79	35	79	35	55	+0.030 +0.011	61	70
JGBF-35 × 89	35	89					70
JGBF-35 × 99	35	99					70
JGBF-35 × 109	35	109					70
JGBF-40 × 39	40	39	40	55	+0.025 +0.009	61	39
JGBF-40 × 49	40	49					49
JGBF-40 × 59	40	59					59
JGBF-40 × 69	40	69					69
JGBF-40 × 79	40	79	40	70	+0.029 +0.010	86	79
JGBF-40 × 89	40	89					80
JGBF-40 × 99	40	99					80
JGBF-40 × 109	40	109					80
JGBF-50 × 49	50	49	50	80	+0.029 +0.010	86	49
JGBF-50 × 59	50	59					59
JGBF-50 × 69	50	69					69
JGBF-50 × 79	50	79					79
JGBF-50 × 89	50	89	50	80	+0.029 +0.010	86	89
JGBF-50 × 99	50	99					90
JGBF-50 × 109	50	109					90
JGBF-50 × 119	50	119					90
JGBF-60 × 99	60	99	60	80	+0.029 +0.010	86	99
JGBF-60 × 109	60	109					109
JGBF-60 × 119	60	119					110
JGBF-60 × 129	60	129					110
JGBF-60 × 149	60	149	60	80	+0.029 +0.010	86	110
JGBF-60 × 159	60	159					110

DIN9834 自润导套
DIN9834 Oilless Guide Bushes

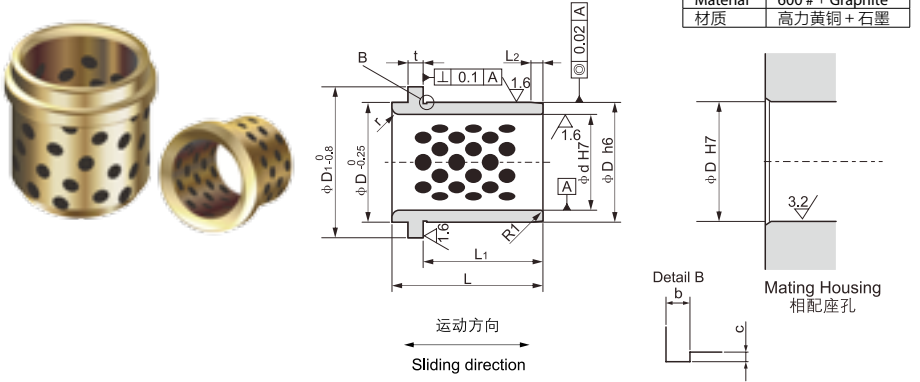


型号规格 Standard No.	d H7		D h6		L	D ₁	L ₁	L ₂	t	r	bxc	P
DIN9834-025	25	^{+0.021} ₀	32	⁰ _{-0.016}	40	40	30	3	6.3	3	0.6x0.3	58
DIN9834-032	32	^{+0.025} ₀	40		50	50	40	4				66
DIN9834-040	40		50		63	63	50	5				79
DIN9834-050	50	^{+0.030} ₀	63	⁰ _{-0.019}	71	71	56	6.3	10	5	1.0x0.4	89
DIN9834-063	63		80	⁰ _{-0.022}	80	90	63	8		6		123
DIN9834-080	80		100	100	112	80	10	8		143		
DIN9834-100	100	^{+0.040} ₀	125	⁰ _{-0.025}	125	140	106	12.5	12	18		168
DIN9834-125	125		160	160	180	132	16	203				
DIN9834-160	160		200	⁰ _{-0.029}	200	220	170	16				243

Clamp VDI-KL(DIN9834)

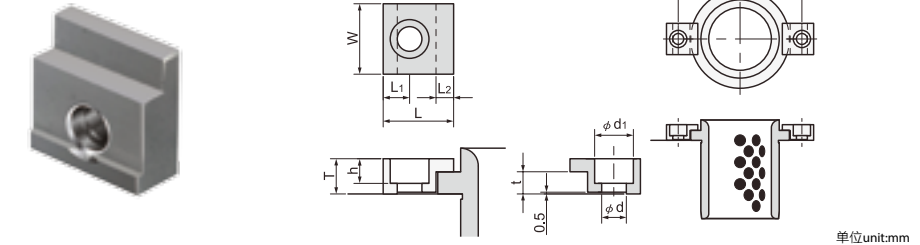

型号规格 Standard No.	W	L	T	L ₁	L ₂	t	d	d ₁	h	适用的轴套内孔尺寸 Applicable bushes ID
VDI-KL-6	20	20	10	7.5	5	6.3	7	11	7	Ø25~Ø50
VDI-KL-10	32	32	16	11	10	10	11.5	17.5	11.5	Ø63~Ø160

JOST 自润滑翻边导向套
JOST Oilless Flanged Guide Bushes

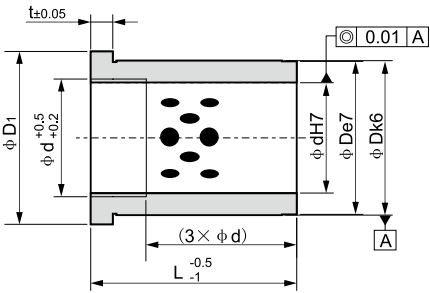

单位unit:mm

型号规格 Standard No.	d	L	t	D	公差 Tolerance		D ₁	d H7
					e7	k6		
JOST-9x12	12	9	3	14	-0.032 -0.050	+0.012 +0.001	16	+0.015 0
JOST-9x17	17							
JOST-9x22	22							
JOST-9x27	27							
JOST-9x36	36	10	3	14	-0.032 -0.050	+0.012 +0.001	16	+0.015 0
JOST-10x12	12							
JOST-10x17	17							
JOST-10x22	22							
JOST-10x27	27	12	3	14	-0.032 -0.050	+0.012 +0.001	16	+0.015 0
JOST-10x36	36							
JOST-12x17	17							
JOST-12x22	22							
JOST-12x27	27	14	3	14	-0.032 -0.050	+0.012 +0.001	16	+0.015 0
JOST-12x36	36							
JOST-14x17	17							
JOST-14x22	22							
JOST-14x27	27	17	3	14	-0.032 -0.050	+0.012 +0.001	16	+0.015 0
JOST-14x36	36							
JOST-14x46	46							
JOST-14x56	56							
JOST-17x17	17	20	3	14	-0.040 -0.061	+0.015 +0.002	25	+0.018 0
JOST-17x22	22							
JOST-17x27	27							
JOST-17x36	36							
JOST-17x46	46	25	3	14	-0.040 -0.061	+0.015 +0.002	25	+0.018 0
JOST-17x56	56							

型号规格 Standard No.	d	L	t	D	公差 Tolerance		D ₁	d H7
					e7	k6		
JOST-16x17	17	16	22	27	-0.040 -0.061	+0.015 +0.002	18	+0.021 0
JOST-16x22	22							
JOST-16x27	27							
JOST-16x36	36							
JOST-16x46	46	18	6	26	-0.040 -0.061	+0.015 +0.002	31	+0.021 0
JOST-16x56	56							
JOST-18x17	17							
JOST-18x22	22							
JOST-18x27	27	20	6	26	-0.040 -0.061	+0.015 +0.002	31	+0.021 0
JOST-18x36	36							
JOST-18x46	46							
JOST-18x56	56							
JOST-18x66	66	25	6	26	-0.040 -0.061	+0.015 +0.002	31	+0.021 0
JOST-20x17	17							
JOST-20x22	22							
JOST-20x27	27							
JOST-20x36	36	25	6	26	-0.040 -0.061	+0.015 +0.002	31	+0.021 0
JOST-20x46	46							
JOST-20x56	56							
JOST-20x66	66							

JOST 自润滑翻边导向套
JOST Oilless Flanged Guide Bushes



Material	600 # + Graphite
材质	高力黄铜+石墨

运动方向
Sliding direction

单位unit:mm


型号规格 Standard No.	d	L	t	D	公差 Tolerance		D ₁	d H7
					e7	k6		
JOST-22x22	22							
JOST-22x27	27							
JOST-22x36	36							
JOST-22x46	46							
JOST-22x56	56	22						22
JOST-22x66	66							
JOST-22x76	76							
JOST-22x86	86							
JOST-24x17	17			30	-0.040 -0.061	+0.015 +0.002	35	
JOST-24x22	22							
JOST-24x27	27							
JOST-24x36	36							
JOST-24x46	46	24					24	+0.021 0
JOST-24x56	56							
JOST-24x66	66							
JOST-24x76	76							
JOST-24x86	86							
JOST-30x27	27			6				
JOST-30x36	36							
JOST-30x46	46							
JOST-30x56	56							
JOST-30x66	66	30					30	
JOST-30x76	76							
JOST-30x86	86							
JOST-30x96	96							
JOST-30x116	116							
JOST-32x27	27			42	-0.050 -0.075	+0.018 +0.002	47	
JOST-32x36	36							
JOST-32x46	46							
JOST-32x56	56							
JOST-32x66	66	32					32	+0.025 0
JOST-32x76	76							
JOST-32x86	86							
JOST-32x96	96							
JOST-32x116	116							

型号规格 Standard No.	d	L	t	D	公差 Tolerance		D ₁	d H7
					e7	k6		
JOST-40x56	56							
JOST-40x66	66							
JOST-40x76	76							
JOST-40x86	86							
JOST-40x96	96	40					40	
JOST-40x116	116							
JOST-40x136	136							
JOST-40x156	156							
JOST-42x56	56			54			60	
JOST-42x66	66							
JOST-42x76	76							
JOST-42x86	86	42	10				42	+0.025 0
JOST-42x96	96							
JOST-42x116	116				-0.060 -0.090	+0.021 +0.002		
JOST-42x136	136							
JOST-42x156	156							
JOST-50x76	76							
JOST-50x86	86							
JOST-50x96	96							
JOST-50x116	116	50	66				72	50
JOST-50x136	136							
JOST-50x156	156							
JOST-50x196	196							
JOST-60x96	96							
JOST-60x116	116							
JOST-60x136	136	60	20	80			86	+0.030 0
JOST-60x156	156							
JOST-60x196	196							

GB71 日系汽车模具标准导套
GB71 NAAMS Standard Guide Bushing




Material	600 # + Graphite
材质	高力黄铜+石墨

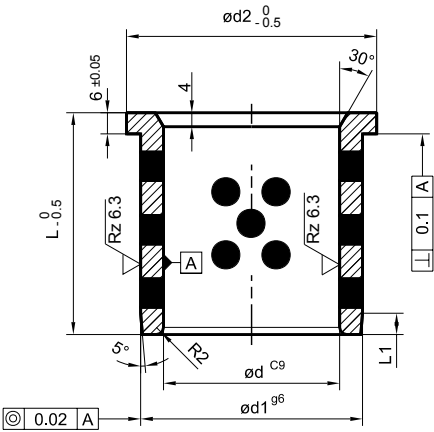

单位unit:mm

产品代号 Standard No.	NAAMS Code	d	d1	d2	L	L1
GB71 2540	G712540	25	32	40	40	4
GB71 3250	G713250	32	40	50	50	4
GB71 4055	G714055	40	50	63	55	5
GB71 5063	G715063	50	63	71	63	6
GB71 6375	G716375	63	80	90	75	8
GB71 8090	G718090	80	100	112	90	10
GB71 100115	G711011	100	125	140	115	12
GB71 125138	G711213	125	160	180	138	12


GB61 日系汽车模具标准导套
GB61 NAAMS Standard Guide Bushing

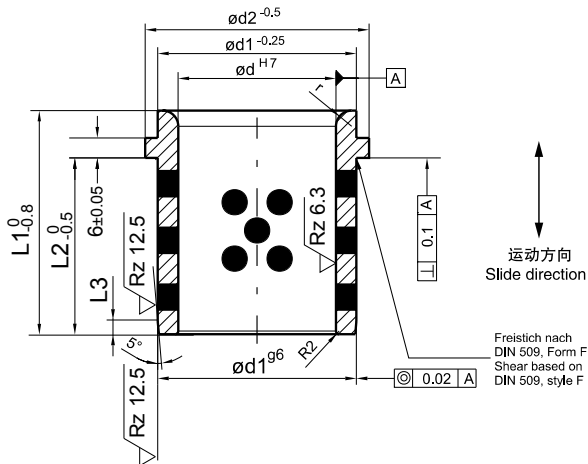


单位unit:mm

产品代号 Standard No.	NAAMS Code	d	d1	d2	L1	L2	L3	r
GB61 2540	G612540	25	32	40	40	30	4	3
GB61 3250	G613250	32	40	50	50	40	4	3
GB61 4063	G614063	40	50	63	63	50	5	3
GB61 5071	G615071	50	63	71	71	56	6	5
GB61 6380	G616380	63	80	90	80	63	8	6
GB61 80100	G618010	80	100	112	100	80	10	8
GB61 10125	G611012	100	125	140	125	106	12	10
GB61 115140	G611114	115	140	155	140	120	12	10
GB61 125160	G611216	125	160	180	160	132	12	12

JEGB / JEGBK 塑胶模射出座导套
JEGB / JEGBK Oilless Ejector Guide Bushing



Material	600 # + Graphite
材质	高力黄铜 + 石墨

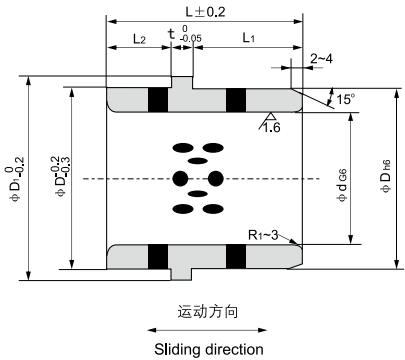


单位unit:mm

型号规格 Standard No.	d	L	d G6	D h6	D ₁	L ₁	L ₂	t
JEGB-16 × 26	16	26						
JEGB-16 × 28	16	28						
JEGB-16 × 33	16	33						
JEGB-16 × 38	16	38						
JEGB-20 × 26	20	26						
JEGB-20 × 28	20	28						
JEGB-20 × 33	20	33						
JEGB-20 × 38	20	38						
JEGB-25 × 26	25	26						
JEGB-25 × 28	25	28						
JEGB-25 × 33	25	33						
JEGB-25 × 38	25	38						
JEGB-30 × 33	30	33						
JEGB-30 × 38	30	38						
JEGB-30 × 46	30	46						
JEGB-35 × 38	35	38						
JEGB-35 × 43	35	43						
JEGB-35 × 48	35	48						
JEGB-40 × 48	40	48						
JEGB-40 × 53	40	53						
JEGB-50 × 48	50	48						
JEGB-50 × 53	50	53						

型号规格 Standard No.	d	L	d G6	D h6	D ₁	L ₁	L ₂	t
JEGBK-25 × 33	25	33						
JEGBK-25 × 38	25	38						
JEGBK-30 × 48	30	48						
JEGBK-30 × 47	30	47						
JEGBK-30 × 52	30	52						
JEGBK-35 × 63	35	63						
JEGBK-40 × 60	40	60						
JEGBK-40 × 70	40	70						
JEGBK-40 × 78	40	78						
JEGBK-40 × 57	40	57						
JEGBK-40 × 67	40	67						
JEGBK-45 × 88	45	88						
JEGBK-45 × 95	45	95						
JEGBK-50 × 67	50	67						
JEGBK-50 × 87	50	87						
JEGBK-60 × 67	60	67						
JEGBK-60 × 87	60	87						

JOSG 射出头自润导套 JOSG Ejector Guide Bushing

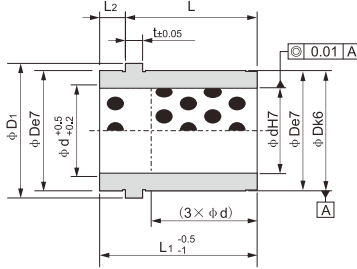

Material	600 # + Graphite
材质	高力黄铜+石墨

运动方向
Sliding direction



单位unit:mm

型号规格 Standard No.	d	L	L ₁	L ₂	t	D	公差 Tolerance e7 k6	D ₁	L ₁
JOSG-9×15	12	15							
JOSG-9×20	17	20							
JOSG-9×25	22	25							
JOSG-9×30	27	30							
JOSG-9×39	36	39	3						
JOSG-10×15	12	15							
JOSG-10×20	17	20							
JOSG-10×25	22	25							
JOSG-10×30	27	30							
JOSG-10×39	36	39	3						
JOSG-14×26	17	26							
JOSG-14×31	22	31							
JOSG-14×36	27	36							
JOSG-14×45	36	45							
JOSG-14×55	46	55							
JOSG-14×65	56	65							
JOSG-15×26	17	26							
JOSG-15×31	22	31							
JOSG-15×36	27	36							
JOSG-15×45	36	45							
JOSG-15×55	46	55							
JOSG-15×65	56	65							
JOSG-18×26	17	26							
JOSG-18×31	22	31							
JOSG-18×36	27	36							
JOSG-18×45	36	45							
JOSG-18×55	46	55							
JOSG-18×65	56	65							
JOSG-18×75	66	75							
JOSG-20×26	17	26							
JOSG-20×31	22	31							
JOSG-20×36	27	36							
JOSG-20×45	36	45							
JOSG-20×55	46	55							
JOSG-20×65	56	65							
JOSG-20×75	66	75							
JOSG-22×26	17	26							
JOSG-22×31	22	31							
JOSG-22×36	27	36							
JOSG-22×45	36	45							
JOSG-22×55	46	55							
JOSG-22×65	56	65							
JOSG-22×75	66	75							
JOSG-22×85	76	85							
JOSG-22×95	86	95							


型号规格 Standard No.	d	L	L ₁	L ₂	t	D	公差 Tolerance e7 k6	D ₁	L ₁
JOSG-24×26	17	26							
JOSG-24×31	22	31							
JOSG-24×36	27	36							
JOSG-24×45	36	45							
JOSG-24×55	46	55							
JOSG-24×65	56	65							
JOSG-24×75	66	75							
JOSG-24×85	76	85							
JOSG-24×95	86	95							
JOSG-30×36	27	36							
JOSG-30×45	36	45							
JOSG-30×55	46	55							
JOSG-30×65	56	65							
JOSG-30×75	66	75							
JOSG-30×85	76	85							
JOSG-30×95	86	95							
JOSG-30×105	96	105							
JOSG-30×125	116	125							
JOSG-32×36	27	36							
JOSG-32×45	36	45							
JOSG-32×55	46	55							
JOSG-32×65	56	65							
JOSG-32×75	66	75							
JOSG-32×85	76	85							
JOSG-32×95	86	95							
JOSG-32×105	96	105							
JOSG-32×125	116	125							
JOSG-40×68	56	68							
JOSG-40×78	66	78							
JOSG-40×88	76	88							
JOSG-40×98	86	98							
JOSG-40×108	96	108							
JOSG-40×128	116	128							
JOSG-40×148	136	148							
JOSG-40×168	156	168							
JOSG-42×68	56	68							
JOSG-42×78	66	78							
JOSG-42×88	76	88							
JOSG-42×98	86	98							
JOSG-42×108	96	108							
JOSG-42×128	116	128							
JOSG-42×148	136	148							
JOSG-42×168	156	168							

自润滑和免维护滑动轴承

JOVL 自润滑板
JOVL Oilless Wear Plate



Material	600 # + Graphite
材质	高力黄铜 + 石墨




单位unit:mm

型号规格 Standard No.	L	W	T	h	t	B
JOVL-01	205	15	12	5		6
JOVL-02	205	20	17	7	5	7.5
JOVL-03	320		22			
JOVL-04	205	28		10	8	11
JOVL-05	320					
JOVL-06	205					
JOVL-07	320		27			
JOVL-08	605					
JOVL-09	205					
JOVL-10	320		36			
JOVL-11	605					


型号规格 Standard No.	L	W	T	h	t	B
JOVL-12	205	28	46	10	8	11
JOVL-13	320					
JOVL-14	605					
JOVL-15	205					
JOVL-16	320	40	66	22	12	14
JOVL-17	605					
JOVL-18	205					
JOVL-19	320		86	26		
JOVL-20	605					

JGBX 自润滑板
JGBX Oilless Wear Plate



运动方向
Sliding directions

Material	600 # + Graphite
材质	高力黄铜 + 石墨




单位unit:mm


型号规格 Standard No.	W	H	L	螺栓 Recom.bolt	
				P	规格 Size
JGBX-20×10	20	10	320	10	M8
JGBX-20×15		15			
JGBX-20×20		20			
JGBX-25×18	25	18	605		
JGBX-25×23		23			
JGBX-25×33		33			
JGBX-30×23		23			
JGBX-30×28	30	28			
JGBX-30×38		38			

型号规格 Standard No.	W	H	L	螺栓 Recom.bolt	
				P	规格 Size
JGBX-35 × 28	35	28	605	12	M10
JGBX-35 × 38		38			
JGBX-35 × 48		48			
JGBX-40 × 28	40	28		14	M12
JGBX-40 × 38		38			
JGBX-40 × 48		48			

JGL 自润滑板
JGL Oilless Wear Plate

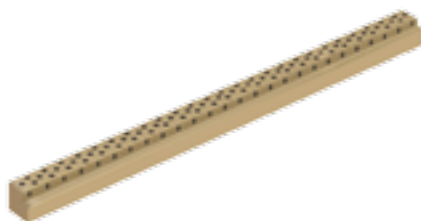



Material	600 # + Graphite
材质	高力黄铜 + 石墨

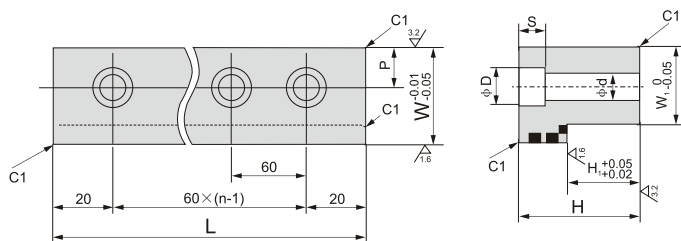

单位unit:mm

型号规格 Standard No.	W	W ₁	L	H	H ₁	n	p	ΦD	Φd	S
JGL-100×30	23	15	100	30	15	2	7.5	11	7	7
JGL-160×30			160			3				
JGL-200×30			220			4				
JGL-100×41			100	41	26	2				
JGL-160×41			160			3				
JGL-200×41			220			4				
JGL-100×25	28	20	100	25	10	2	10	18	11	13
JGL-160×25			160			3				
JGL-200×25			220			4				
JGL-100×35			100	35	15	2				
JGL-160×35			160			3				
JGL-200×35			220			4				
JGL-100×56	28	20	100	56	26	2	10	14	9	10
JGL-160×56			160			3				
JGL-200×56			220			4				


JCGBF,JCGBW 自润滑板
JCGBF,JCGBW Oilless Wear Plate

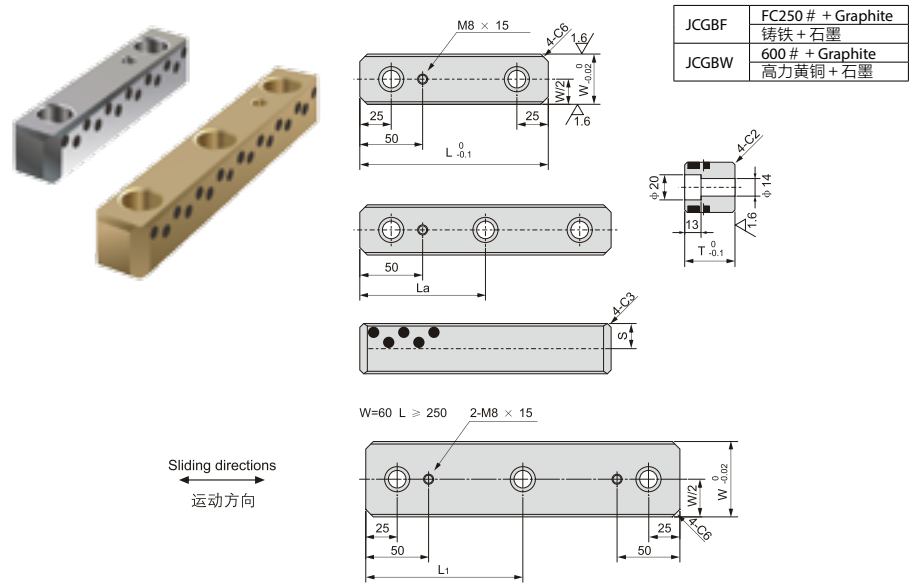




单位unit:mm

型号规格 Standard No.	材料 Material	W	L	T	L ₁	S
30 × 100 × 30	JCGBF	30	100	30	-	15
30 × 150 × 30			150		-	
30 × 200 × 30			200		100	
30 × 250 × 30			250		125	
30 × 300 × 30			300		150	
30 × 350 × 30			350		175	
40 × 100 × 30	JCGBF	40	100	30	-	15
40 × 150 × 30			150		-	
40 × 200 × 30			200		100	
40 × 250 × 30			250		125	
40 × 300 × 30			300		150	
40 × 350 × 30			350		175	
30 × 100 × 40	JCGBF JCGBW	40	100	40	-	20
30 × 150 × 40			150		-	
30 × 200 × 40			200		100	
30 × 250 × 40			250		125	
30 × 300 × 40			300		150	
30 × 350 × 40			350		175	
40 × 100 × 40	JCGBW	60	100	40	-	25
40 × 250 × 40			250		125	
40 × 300 × 40			300		150	
40 × 350 × 40			350		175	

JVSOL 自润滑板
JVSOL Oilless Wear Plate



Material	600 # + Graphite
材质	高力黄铜+石墨

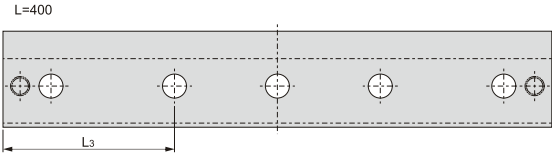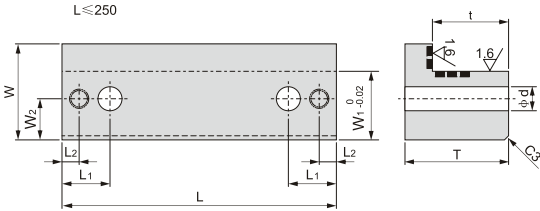


Sliding directions
运动方向



单位unit:mm

型号规格 Standard No.	W	L	W ₁	W ₂	L ₁	L ₂	L ₃	T	t	d	d ₁
JVSOL-25 × 125	25	125	18	9				15.5	8.5	9	6
JVSOL-25 × 160		160									
JVSOL-32 × 125	32	125	22	11	27.5	10		30.5	15.5	11	8
JVSOL-32 × 160		160									
JVSOL-32 × 200		200									
JVSOL-55 × 100	55	100	37	20				55.5	39.5	13.5	10
JVSOL-55 × 160		160									
JVSOL-70 × 160	70	160	50	30	35	12.5		75.5	55.5	17.5	12
JVSOL-70 × 200		200									
JVSOL-70 × 250		250									
JVSOL-70 × 400		400					125				
JVSOL-85 × 160	85	160	63	38	42.5	15		90.5	65.5	22	16
JVSOL-85 × 200		200									
JVSOL-85 × 250		250									
JVSOL-85 × 400		400					125				

JCUW/JCUF/JCUS 自润滑板
JCUW/JCUF/JCUS Oilless Wear Plate



Sliding directions
运动方向


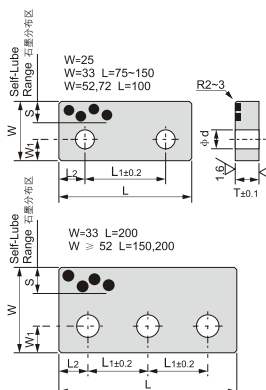


JCUF	FC250 # + Graphite 铸铁 + 石墨
JCUW	600 # + Graphite 高力黄铜 + 石墨
JCUS	S45C + Graphite 碳钢 + 石墨

单位unit:mm

型号规格 Standard No.	材料 Material	W	L	T	L ₁	L ₂	L ₃	W ₁	s	d	螺孔数Bolt Hole Q'ty
25 × 75	JCUW	25	75	10	45	15		8	7.5	9	2
25 × 100			100		50	25					
25 × 125			125		75						
33 × 75	JCUW	33	75	10	45	15	-	12.5	9	11	2
33 × 100			100		50						
33 × 125			125		75						
33 × 150			150		100						
33 × 200	JCUW JCUF JCUS	52	200	20	75		50	20	13	13	3
52 × 100			100		50						2
52 × 150			150		50						3
52 × 200			200		75						4
52 × 250	JCUW JCUF JCUS	72	250	30	75	25	50	22	32	18	2
72 × 100			100		50						3
72 × 150			150		50						4
72 × 200			200		75						3
72 × 250	JCUW JCUF JCUS	77	250	35	75	25	50	25	32	18	4
77 × 150			150		50						3
77 × 200			200		75						4
77 × 250			250		75						3
82 × 150	JCUW JCUF JCUS	82	150	40	50	75	50	25	32	18	3
82 × 200			200		75						4
82 × 250			250		75						3
105 × 150	JCUW JCUF	105	150	40	50	75	50	25	32	18	3
105 × 200			200		50						4
105 × 250			250		75						4

JCSRG,JCSRW 自润滑板
JCSRG,JCSRW Oilless Wear Plate

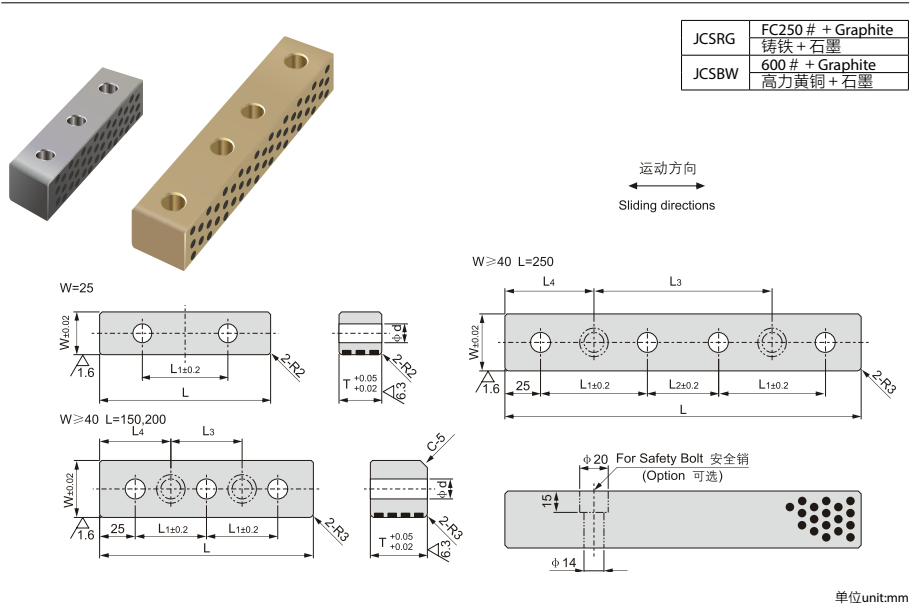


型号规格 Standard No.	材料 Material	W	L	L ₃	L ₄	T	L ₁	L ₂	d	
25 × 75 × 25	JCSRG	25	75	-	-	25	45	-	11	
25 × 100 × 25			100				50			
25 × 125 × 25			125				75			
25 × 150 × 25			150				100			
40 × 150 × 30	JCSRG JCSRW	40	150	50	50	30	50	-	14	
40 × 200 × 30			200	75	62.5		75			
40 × 250 × 30			250	125	62.5		75			50
40 × 150 × 40			150	50	50	50	40	50		-
40 × 200 × 40	200	75	62.5	75	50					
40 × 250 × 40	250	125	62.5	75	50					
50 × 150 × 45	JCSRG JCSRW	50	150	50	50	45	50	-	20	
50 × 200 × 45			200	75	62.5		75			
50 × 250 × 45			250	125	62.5		75			55
50 × 150 × 55			150	50	50	50				
50 × 200 × 55			200	75	62.5	75	50			
50 × 250 × 55			250	125	62.5	75	50			
50 × 150 × 60			150	50	50	60	50	-		
50 × 200 × 60			200	75	62.5		75			
50 × 250 × 60			250	125	62.5					50
50 × 150 × 70			150	50	50	70	50	-		
50 × 200 × 70			200	75	62.5		75			
50 × 250 × 70			250	125	62.5		75		50	

JVG2 自润滑板
JVG2 Oilless Wear Plate

Material	600 # + Graphite
材质	高力黄铜+石墨




Sliding directions
运动方向

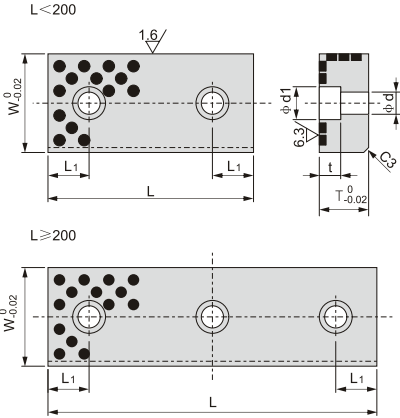



单位unit:mm

型号规格 Standard No.	W	L	T	L ₁	d	d ₁	t	Recommend mounting bolt DIN EN ISO4762
JVG2 25 × 110 × 12	25	110	12	25	9	15	8.5	M8 × 20
JVG2 25 × 120 × 12		120						
JVG2 25 × 110 × 15		110	15		11	18	10.5	M10 × 25
JVG2 25 × 120 × 15		120						
JVG2 60 × 125 × 30	60	125	30		13.5	20	13	M12 × 35
JVG2 60 × 160 × 30		160						
JVG2 60 × 200 × 30		200						
JVG2 60 × 125 × 40		125	40					M12 × 45
JVG2 60 × 160 × 40		160						
JVG2 60 × 200 × 40		200						

JSOD 自润滑板
JSOD Oilless Wear Plate

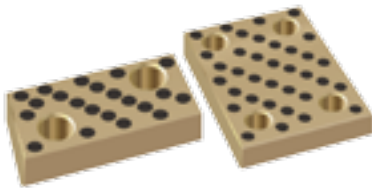


Sliding directions
运动方向

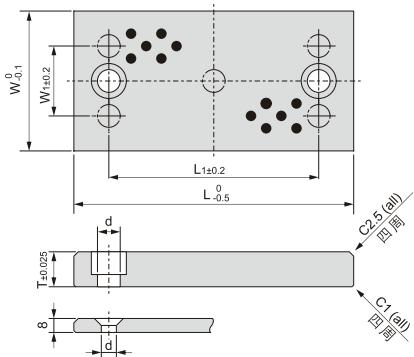



单位unit:mm

型号规格 Standard No.	T	W	W ₁	L ₁	L	螺栓数量 Screw Q'ty	Mounting Bolt	螺孔排布 Hole Pattern
JSOD 8 × 40 × 100	8	40	-	60	100	2	M8	A
JSOD 8 × 40 × 160				120	160	2		A
JSOD 8 × 40 × 250				210	250	3		C
JSOD 12 × 30 × 100	12	30	-	60	100	2	M8	A
JSOD 12 × 30 × 160				120	160	2		A
JSOD 12 × 30 × 250				210	250	3		C
JSOD 12 × 40 × 100	12	40	-	60	100	2	M8	A
JSOD 12 × 40 × 160				120	160	2		A
JSOD 12 × 40 × 250				210	250	3		C
JSOD 12 × 80 × 100	12	80	40	60	100	2	M8	B
JSOD 12 × 80 × 160				120	160	4		E
JSOD 12 × 80 × 250				210	250	5		F
JSOD 16 × 40 × 100	16	40	-	60	100	2	M10	A
JSOD 16 × 40 × 160				120	160	2		A
JSOD 16 × 40 × 250				210	250	3		C
JSOD 16 × 60 × 100	16	60	30	60	100	2	M10	B
JSOD 16 × 60 × 160				120	160	2		B
JSOD 16 × 60 × 250				210	250	3		D
JSOD 16 × 100 × 100	16	100	60	60	100	2	M10	B
JSOD 16 × 100 × 160				120	160	4		E
JSOD 16 × 100 × 250				210	250	6		G
JSOD 20 × 50 × 100	20	50	20	60	100	2	M12	B
JSOD 20 × 50 × 160				120	160	2		B
JSOD 20 × 50 × 250				210	250	3		D
JSOD 20 × 80 × 100	20	80	40	60	100	2	M12	B
JSOD 20 × 80 × 160				120	160	4		E
JSOD 20 × 80 × 250				210	250	5		F
JSOD 20 × 125 × 100	20	125	85	60	100	4	M12	E
JSOD 20 × 125 × 160				120	160	4		E
JSOD 20 × 125 × 250				210	250	6		G

JSOVP 自润滑板
JSOVP Oilless Wear Plate



Material	600 # + Graphite
材质	高力黄铜+石墨




运动方向
Sliding directions

单位unit:mm

型号规格 Standard No.	d	W	T
JSOVP-25 × 305 × 5	305	25	5.3
JSOVP-25 × 305 × 6		30	6.3
JSOVP-40 × 605 × 8	605	40	8.3
JSOVP-35 × 605 × 10		35	10.3
JSOVP-50 × 605 × 10		50	10.3
JSOVP-40 × 605 × 12		40	12.3
JSOVP-80 × 605 × 12		80	12.3
JSOVP-60 × 605 × 16		60	16.3
JSOVP-80 × 605 × 20		80	20.3
JSOVP-100 × 605 × 20		100	20.3

JEFW 自润滑套
JEFW Guide Bushes




Material	600 # + Graphite
材质	高力黄铜 + 石墨




单位unit:mm

型号规格 Standard No.	d	L	d	h7	D	m ₆	D ₁	T	R	r1	r ₁
JEFW-25 × 40	25	40	25	+0.021	35	+0.025	45	7	10	1	
JEFW-30 × 50	30	50	30	0	40	+0.009	50				
JEFW-40 × 70	40	70	40	+0.025	55		65				
JEFW-50 × 80	50	80	50	0	65	+0.030	75				
JEFW-60 × 80	60	80	60		75	+0.011	85				
JEFW-65 × 80	65	80	65		80		90				
JEFW-65 × 120	65	120	65	+0.030	80		90				
JEFW-80 × 100	80	100	80	0	100		110				
JEFW-80 × 140	80	140	80		100	+0.035	110				
JEFW-100 × 100	100	100	100	+0.035	120	+0.013	130				
JEFW-100 × 140	100	140	100	0	120		130				

JPBW,JPBF 自润滑轴套
JPBW,JPBF Oilless Wear Plate




JPBF	FC250 # + Graphite
	铸铁+石墨
JPBW	600 # + Graphite
	高力黄铜 + 石墨



单位unit:mm


型号规格 Standard No.	d	d	H7	D	公差 Tolerance	L	L ₁	L ₂
JPBW JPBF	25	25	+0.021	40	± 0.008	40	10	5
	30	30	0	50		50	50	
	35	35		60		55	15	
	40	40	+0.025	60	± 0.0095	60	10	10
	50	50	0	70		75	15	
	60	60	+0.030	80		90	20	
	80	80	0	100	± 0.011	120	25	
	100	100	+0.035	120		150	25	
	120	120	0	140	± 0.0125	180	25	

JGBZ 自润滑板
JGBZ Oilless Wear Plate




Material	600 # + Graphite
材质	高力黄铜 + 石墨


W = 100, 120, 150



W = 50 and 70



W = 180




Sliding Direction

单位unit:mm

型号规格 Standard No.	W	L	W	h7	L ₁	L ₂	L ₃	W ₁	W ₂	D	d	t	e	s	T
JGBZ-50 × 160	50	160	50	0 -0.025	20	50								60	30
JGBZ-50 × 200		200				50								120	
JGBZ-50 × 260		260				80								120	
JGBZ-70 × 230	70	230	70	0 -0.030	25	60		-	-	26	18	18	10	100	35
JGBZ-70 × 260		260				60								160	
JGBZ-70 × 300		300				75								160	
JGBZ-70 × 350		350				150								150	
JGBZ-100 × 230	100	230	100	0 -0.035		60	-	20						100	45
JGBZ-100 × 280		280				60								160	
JGBZ-100 × 330		330				100								160	
JGBZ-100 × 390		390				120								200	
JGBZ-120 × 230	120	230	120			60			60					100	45
JGBZ-120 × 280		280				60								160	
JGBZ-120 × 330		330				100								160	
JGBZ-120 × 390		390				120								200	
JGBZ-150 × 280	150	280	150			60			90	32	22	22	15	160	50
JGBZ-150 × 330		330				80								190	
JGBZ-150 × 390		390				140								190	
JGBZ-150 × 430		430				180								190	
JGBZ-180 × 280	180	280	180	0 -0.040	30	60	60		120					160	55
JGBZ-180 × 330		330				80								190	
JGBZ-180 × 390		390				140								190	
JGBZ-180 × 430		430				180								190	
JGBZ-180 × 480		480				200								200	
JGBZ-180 × 550		550				225								250	

JOPF,JOPS,JOPW 自润滑板
JOPF,JOPS,JOPW Oilless Wear Plate

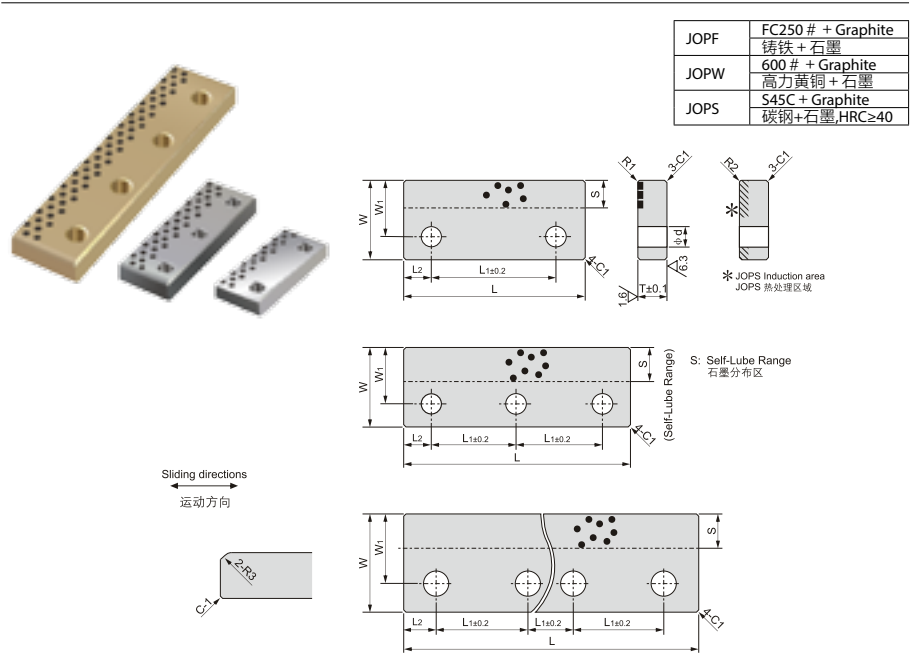

型号规格 Standard No.	W	L	T	W ₁	L ₁	L ₂	d	s	螺栓孔数量 Bolt Hole	Q'ty
JOPF-55 × 180	55	180	37.5	120	30	24			2	
JOPF-70 × 160	160		25	110	25	25				
JOPF-70 × 200	70	200	50	75	25	18			3	
JOPF-70 × 240		240		90	30	30				
JOPF-85 × 200	200			75	25				4	
JOPF-85 × 240	85	240	60	90	30					
JOPF-85 × 300		300		80	30				3	
JOPF-85 × 350		350	28	90	40	22	30		4	
JOPF-100 × 200	200			75	25				3	
JOPF-100 × 240	100	240	70	90	30					
JOPF-100 × 300		300		80	30				4	
JOPF-100 × 350		350		90	40					
JOPF-70 × 160	160			110	25	25			2	
JOPF-70 × 200	70	200	25	75	25	18			3	
JOPF-70 × 240		240		90	30	30				


型号规格 Standard No.	W	L	T	W ₁	L ₁	L ₂	d	s	螺栓孔数量 Bolt Hole	Q'ty
JOPS-85 × 200	200			75	25				3	
JOPS-85 × 240	240			90	30					
JOPS-85 × 300	300		60	80	30				4	
JOPS-85 × 350	350			90	40					
JOPS-100 × 200	200		28	75	25	22	30		3	
JOPS-100 × 240	100	240	70	90	30					
JOPS-100 × 300		300		80	30				4	
JOPS-100 × 350		350		90	40					
JOPW-70 × 160	160			110	25		25		2	
JOPW-70 × 200	70	200	25	75	25	18			3	
JOPW-70 × 240		240		90	30		30			
JOPW-85 × 200	200			75	25				4	
JOPW-85 × 240	85	240	28	90	30	22	30			
JOPW-85 × 300		300		80	30					
JOPW-85 × 350		350		90	40					

JCSDP 自润滑板
JCSDP Oilless Wear Plate

Material	600 # + Graphite
材质	高力黄铜+石墨






Sliding directions
运动方向

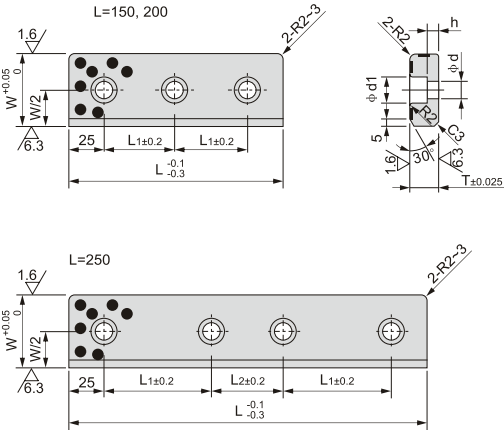

单位unit:mm

型号规格 Standard No.	W	L	T	L ₁	L ₂	d	d ₁	h
JCSDP 50 × 150 × 20	50	150	20	50	-	11	17.5	8
JCSDP 50 × 200 × 20		200		75	-			
JCSDP 50 × 250 × 20		250		75	50			
JCSDP 50 × 150 × 35		150	35	50	-	13	20	20
JCSDP 50 × 200 × 35		200		75	-			
JCSDP 50 × 250 × 35		250		75	50			
JCSDP 50 × 150 × 20	75	150	20	50	-	11	17.5	8
JCSDP 50 × 200 × 20		200		75	-			
JCSDP 50 × 250 × 20		250		75	50			
JCSDP 50 × 150 × 35		150	35	50	-	13	20	20
JCSDP 50 × 200 × 35		200		75	-			
JCSDP 50 × 250 × 35		250		75	50			

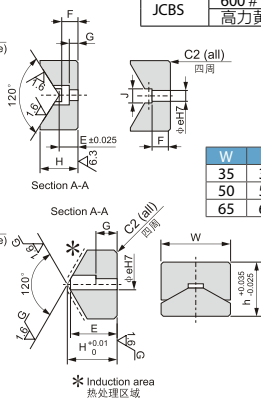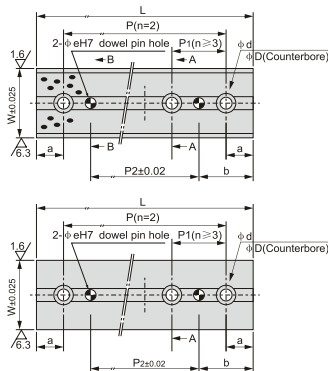

W	h	d	D
35	35	9	14
50	50	11	17.5
65	65	11	17.5

* Induction area
热处理区域



型号规格 Standard No.	W	L	H	a	b	P	P1	螺栓数量 No. of Bolt Holes	e	P2	E	F	G	J	
JCBS-75 × 35	35	75	24	15	30	45		2	8	15	15		4	11	
JCBS-100 × 35		100		20	40	60				20					
JCBS-125 × 35		125		20	40	85				45					
JCBS-150 × 35		150		20	40	110				70					
JCBS-75 × 50	50	75	31	15	30	45	-	2		15	15		8	13	
JCBS-100 × 50		100		20	40	60				20					
JCBS-125 × 50		125		25	50	75				25					
JCBS-150 × 50		150		25	50	100				50					
JCBS-100 × 65	65	100	35	20	40	60	50	3	10	20	18		8	13	
JCBS-150 × 65		150		25	50	-				50					
JCBS-200 × 65		200		25	50	-				4					100
JCBS-250 × 65		250		25	50	-				5					150
JCBS-300 × 65		300		25	50	-		6		200					

[illegible]

JSPW,JSPS 凸轮行程滑板
JSPW,JSPS Cam Stroke Plate




JSPS	S45C+Graphite 钢基+石墨 HRC≥55
JSPW	600 # + Graphite 高力黄铜+石墨

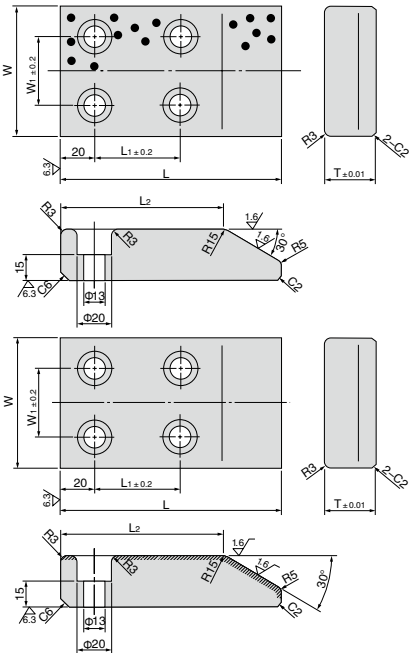






单位unit:mm

型号规格 Standard No.	W	L	T	W ₁	L ₁	L ₂
JSPW/JSPS-75 × 130	75	130	30	40	50	95
JSPW/JSPS-75 × 150		150	45		45	90
JSPW/JSPS-100 × 130		130	30		50	95
JSPW/JSPS-100 × 150	100	150	45	60	45	90
JSPW/JSPS-100 × 170		170	60		45	90
JSPW/JSPS-100 × 200		200	60		75	120
JSPW/JSPS-125 × 130	125	130	30	85	50	95
JSPW/JSPS-125 × 150		150	45		45	90
JSPW/JSPS-125 × 170		170	60		45	90
JSPW/JSPS-125 × 200		200	60		75	120
JSPW/JSPS-150 × 130	150	130	30	110	50	95
JSPW/JSPS-150 × 150		150	45		45	90
JSPW/JSPS-150 × 170		170	60		45	90
JSPW/JSPS-150 × 200		200	60		75	120

JSPQ,JSPQS 凸轮行程滑板
JSPQ,JSPQS Cam Stroke Plate



JSPQS	S45C + Graphite 铜基 + 石墨HRC≥55
JSPQ	650 # + Graphite 高力黄铜 + 石墨



Sliding directions
运动方向


单位unit:mm

型号规格 Standard No.	W	L	T	W ₁
JSPQ/JSPQS-150 × 170	150	170	60	100
JSPQ/JSPQS-150 × 200	150	200	90	100
JSPQ/JSPQS-200 × 170	200	170	60	140
JSPQ/JSPQS-200 × 200	200	200	90	140

JPWS,JPSS 凸轮行程滑板
JPWS,JPSS Cam Stroke Plate




JPSS	S45C + Graphite 铜基 + 石墨HRC≥55
JPWS	650 # + Graphite 高力黄铜 + 石墨

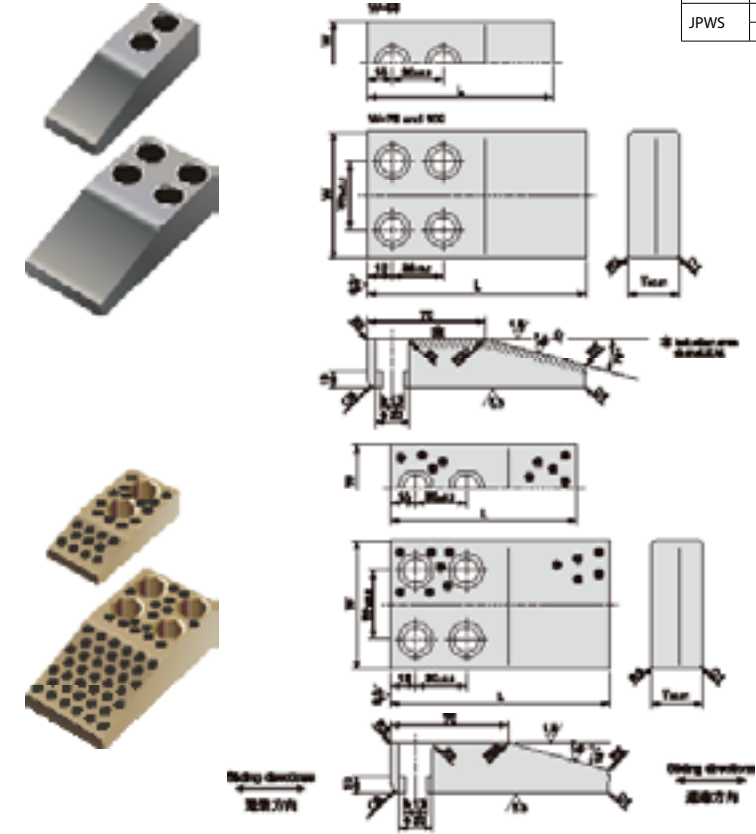

单位unit:mm


型号规格 Standard No.	W	L	T	W ₁
JPWS/JPSS-50 × 110	50	110	25	—
JPWS/JPSS-50 × 130	50	130	30	—
JPWS/JPSS-75 × 110	75	110	25	40
JPWS/JPSS-75 × 130	75	130	30	40
JPWS/JPSS-100 × 110	100	110	25	60
JPWS/JPSS-100 × 130	100	130	30	60

JPGPB 自润滑板
JPGPB Oilless Wear Plate

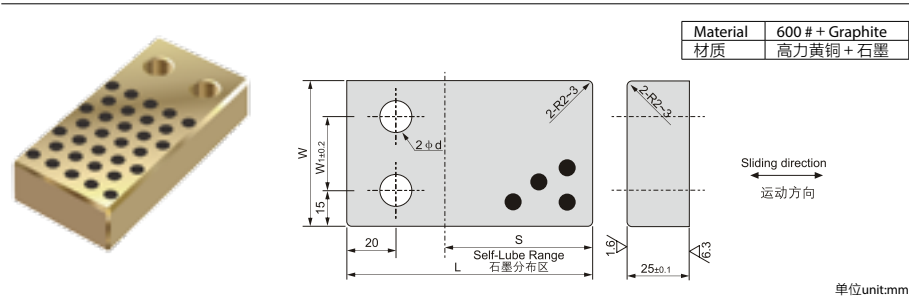

型号规格 Standard No.	W	L	S	W ₁	d
JPGPB-60 × 80	60	80	40	30	13
JPGPB-60 × 100	60	100	60	30	13
JPGPB-60 × 120	60	120	80	30	13
JPGPB-100 × 80	100	80	40	70	18
JPGPB-100 × 100	100	100	60	70	18
JPGPB-100 × 120	100	120	80	70	18
JPGPB-150 × 80	150	80	40	120	18
JPGPB-150 × 100	150	100	60	120	18
JPGPB-150 × 120	150	120	80	120	18



JPGPC 自润滑板
JPGPC Oilless Wear Plate

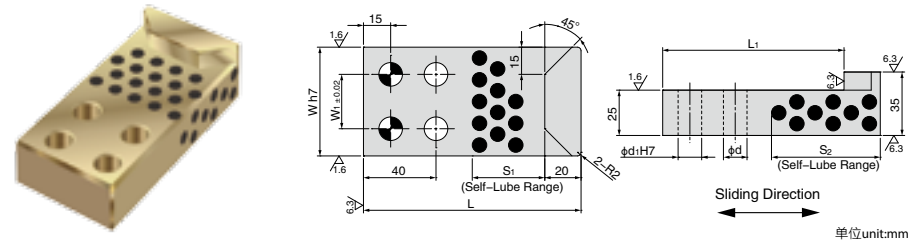


型号规格 Standard No.	W h7	L ₁	L ₂	S ₁	S ₂	W ₁	d	d ₁
JPGPC-60 × 120	60	120	100	40	60	30	13	13
JPGPC-60 × 140	60	140	120	60	80	30	13	13
JPGPC-60 × 160	60	160	140	80	100	30	13	13
JPGPC-100 × 120	100	120	100	40	60	70	18	16
JPGPC-100 × 140	100	140	120	60	80	70	18	16
JPGPC-100 × 160	100	160	140	80	100	70	18	16
JPGPC-150 × 120	150	120	100	40	60	120	18	16
JPGPC-150 × 140	150	140	120	60	80	120	18	16
JPGPC-150 × 160	150	160	140	80	100	120	18	16

JPRP 凸轮退回滑板
JPRP Oilless Cam Positive Return Plate


Material	600 # + Graphite
材质	高力黄铜+石墨

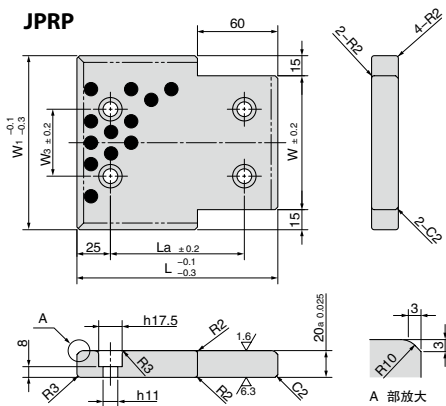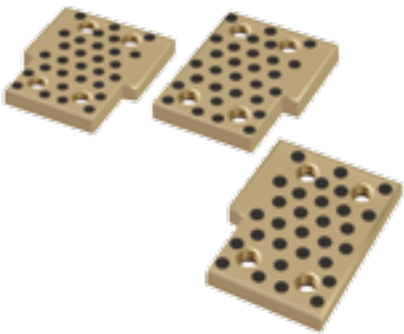

JPRPL





JPRPR



单位unit:mm

材料 Material	型号规格 Standard No.	W	L	W1	W2	W3	La
JPRP JPRPL JPRPR	75 × 100	75	100	105	90	40	50
	75 × 125	75	125	105	90	40	75
	75 × 150	75	150	105	90	40	100
	100 × 125	100	125	130	115	50	75
	100 × 150	100	150	130	115	50	100
	125 × 150	125	150	155	140	75	100
	125 × 200	125	200	155	140	75	150
	125 × 250	125	250	155	140	75	200
	150 × 200	150	200	180	165	100	150
	150 × 250	150	250	180	165	100	200

JOCU 自润滑倾斜顶出件
JOCU Oilless Inclined Bolt Guide

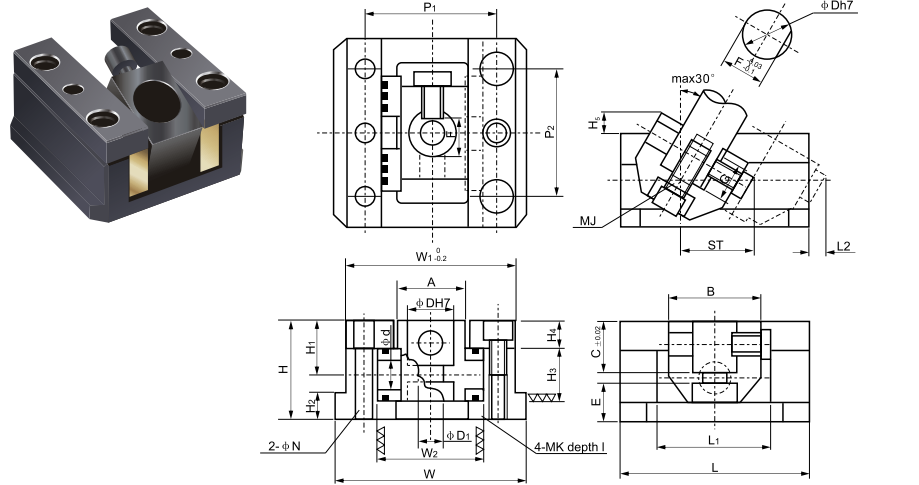

单位unit:mm

产品代号 Standard No.	ΦD	Φd	ΦD ₁	A	B	C	E	F	G	MJ	H	H ₁	H ₂	H ₃	H ₄
JOCU-8	8	7	4.5	11	20	8	10	7	8	M4	22	12.5	5	11	7
JOCU-10	10	7	4.5	15	25	10	12.5	9	9	M5	27	15.5	5	15	8
JOCU-12	12	10	7	17	25	12	15	11	10	M6	32	18	7	16	10
JOCU-16	16	12	9	22	30	16	15	14.5	12	M8	36	20	8	20	10
JOCU-20	20	14	11	26	40	20	16	18	16	M10	42	23	11	22	12
JOCU-25	25	16	14	32	45	25	17	22.5	20	M12	50	28	15	26	15
JOCU-30	30	18	14	38	50	30	17	27	25	M12	55	30	15	30	15
JOCU-35	35	20	14	45	60	35	18	32	30	M12	62	35	15	34	18
JOCU-40	40	25	18	55	70	40	19	36	35	M16	70	40	15	44	18
JOCU-45	45	30	18	60	80	45	24	40	40	M16	80	45	15	50	20

产品代号 Standard No.	H ₅	L	L ₁	L ₂	W	W ₁	W ₂	P ₁	P ₂	MK	I	ΦN	ST
JOCU-8	10.5	32	20	3.6	33	30	19	24	20	M3	9.5	3	10
JOCU-10	11.3	45	25	4.5	45	40	25	32	30	M4	14	4	18
JOCU-12	4	50	30	8	57	51	31	39	35	M6	14	6	20
JOCU-16	5	65	40	8	65	58	38	46	40	M6	16	6	25
JOCU-20	8	80	50	8	80	72	44	56	55	M8	19	8	30
JOCU-25	8	90	55	12	93	85	52	66	65	M10	22	10	35
JOCU-30	9	100	60	12	101	93	60	74	70	M10	25	10	40
JOCU-35	10	120	75	8	120	110	70	85	80	M12	27	10	45
JOCU-40	12	135	85	8	130	120	80	95	90	M12	30	10	50
JOCU-45	14	150	95	10	140	130	90	105	110	M12	35	10	55